


Item	Description	Qty
A	Winch Mount	1
B	Fairlead Mount	1
C	Fairlead Mount Adapter	1

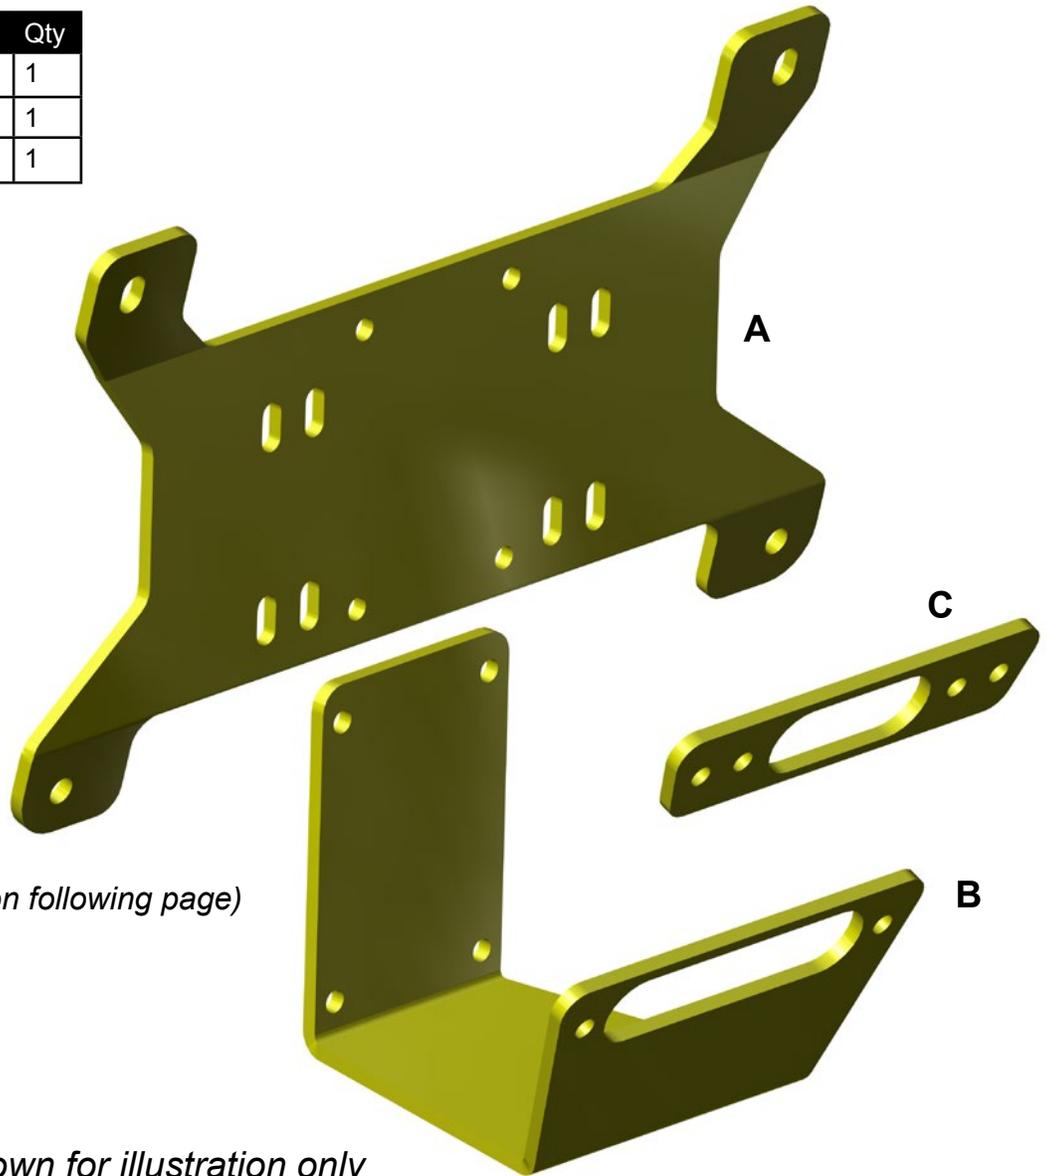

(kit contents continue on following page)

Winch not included; shown for illustration only

Read instructions and view illustrations before beginning.

Need help with your installation?



sales@superatv.com



www.superatv.com



1-812-574-7777



8:00am - 9:00pm EST M-Th
8:00am - 7:00pm EST Friday
9:00am - 2:00pm EST Saturday

Thank You
For Choosing

Liability Statement


SuperATV's products are designed to best fit users ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory, or aftermarket, parts will void any warranty provided by SuperATV and is not recommended. SuperATV's products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV to verify that they will work together.

Although SuperATV has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV products, user agrees that should damages occur, SuperATV will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV will warranty only parts provided by SuperATV. Any damage or problems with OEM housings, bearings, seals, or other manufacturers products will not be covered by SuperATV. SuperATV parts and products are not warranted if item was not installed properly, misused, or modified.



(kit contents continued)

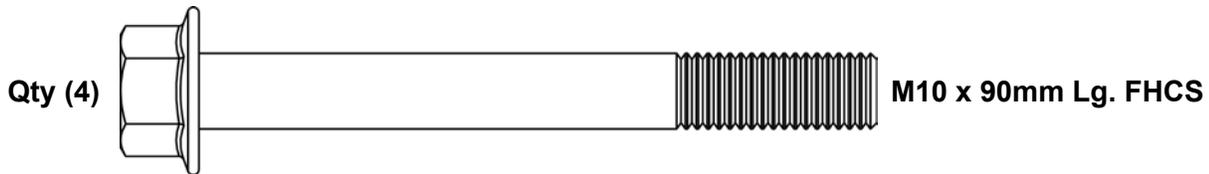

Do not tighten hardware completely unless noted. Keep all components removed from machine.

1. Remove Bumper from machine. See Fig. 1.
2. Remove and replace forward most hardware from A-Arms with supplied M10-1.50 x 90mm Lg. FHCS. (*Bolt heads to face rear of machine*). **Do not install Nuts.** See Fig. 1.
3. Join Winch Mount (A) to Fairlead Mount (B) with M8-1.25 x 25mm Lg. FHCS and M10-1.50 Nylock Nuts. See Fig. 2.
4. Install Fairlead to Fairlead Mount (B); hardware and Fairlead included with Winch. See Fig. 3.
 - SuperATV 3500 Lb. Winch will require installation of Fairlead Mount Adapter (C) as shown in Fig. 4.
5. Install Winch to Winch Mount (A) *with hardware included with Winch.* See Fig. 5.
6. Install Winch Mount (A) on to previously installed M10-1.50 x 90mm Lg. FHCS and secure with provided M10-1.50 Nylock Nuts. See Figs. 6- 6b.
7. Reinstall Bumper and tighten all hardware completely.

(illustrations continue on following pages)

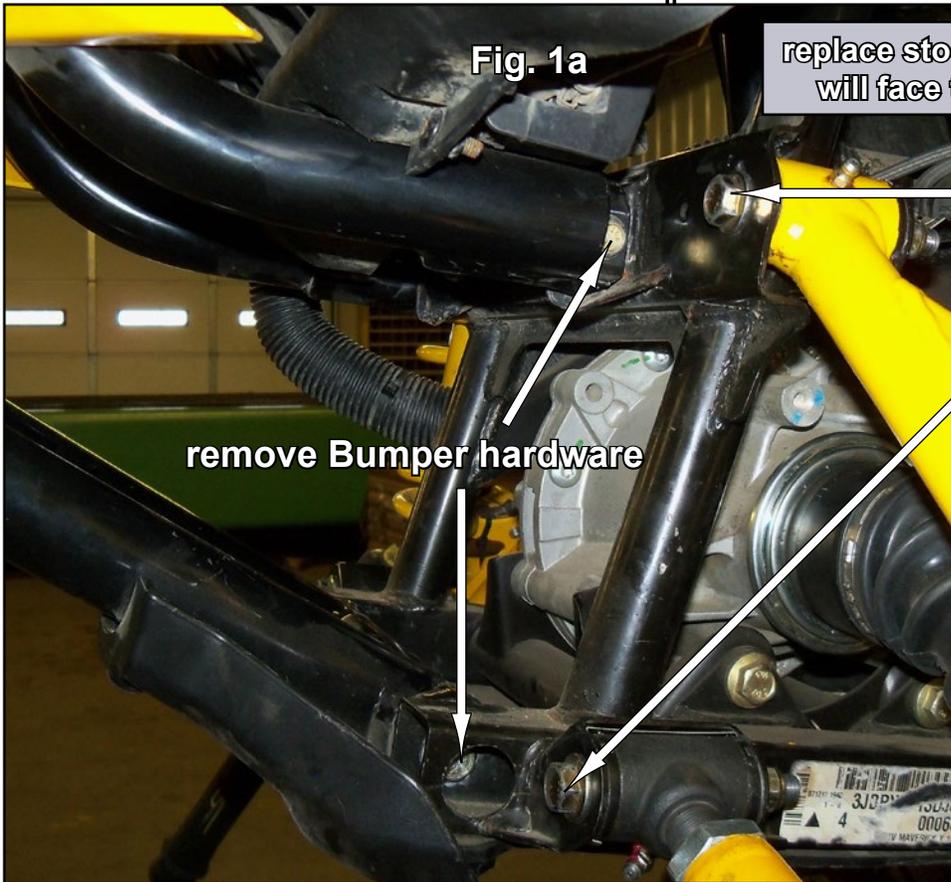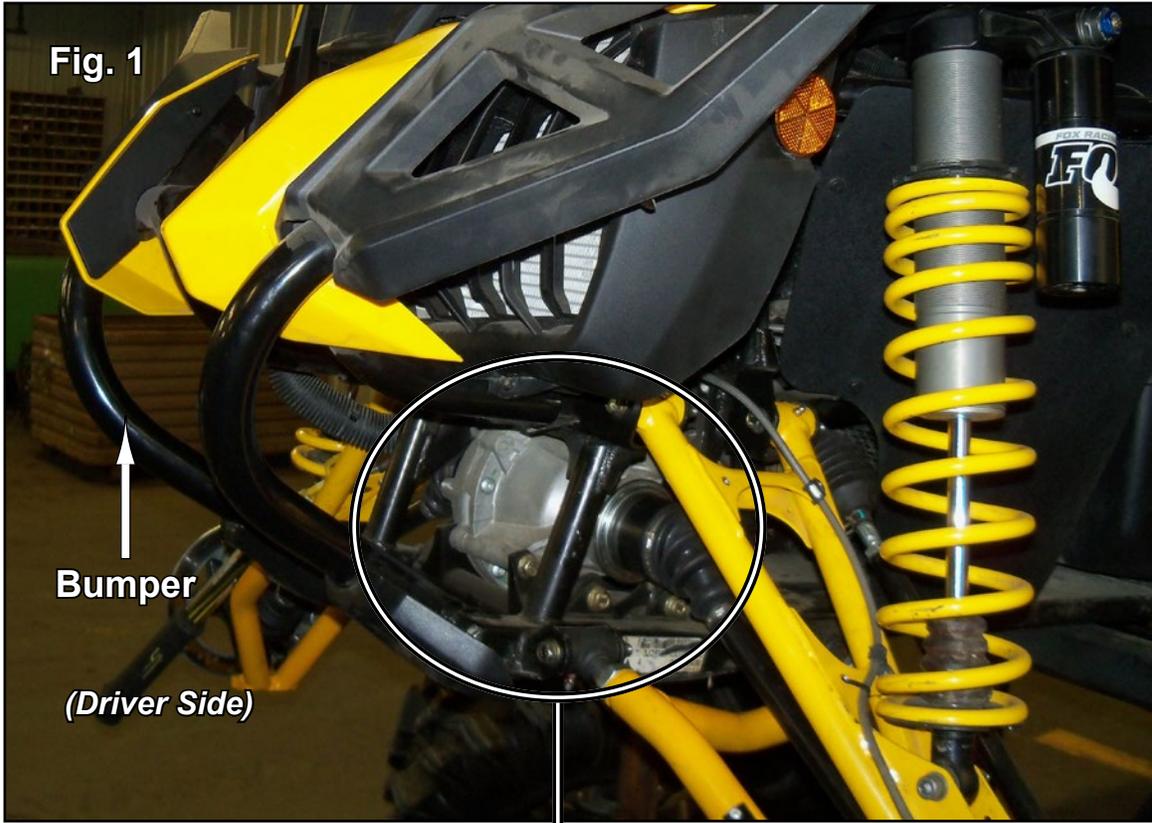

replace stock A-Arm Bolts; Bolt heads will face towards rear of machine.

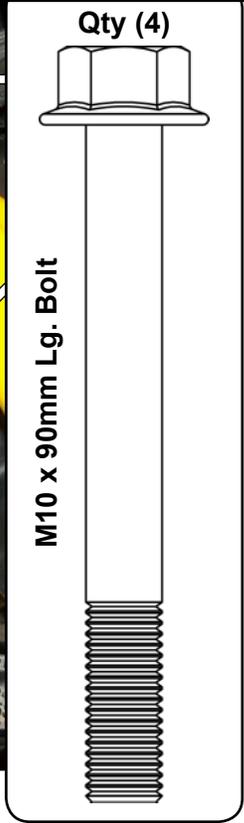


Fig. 2







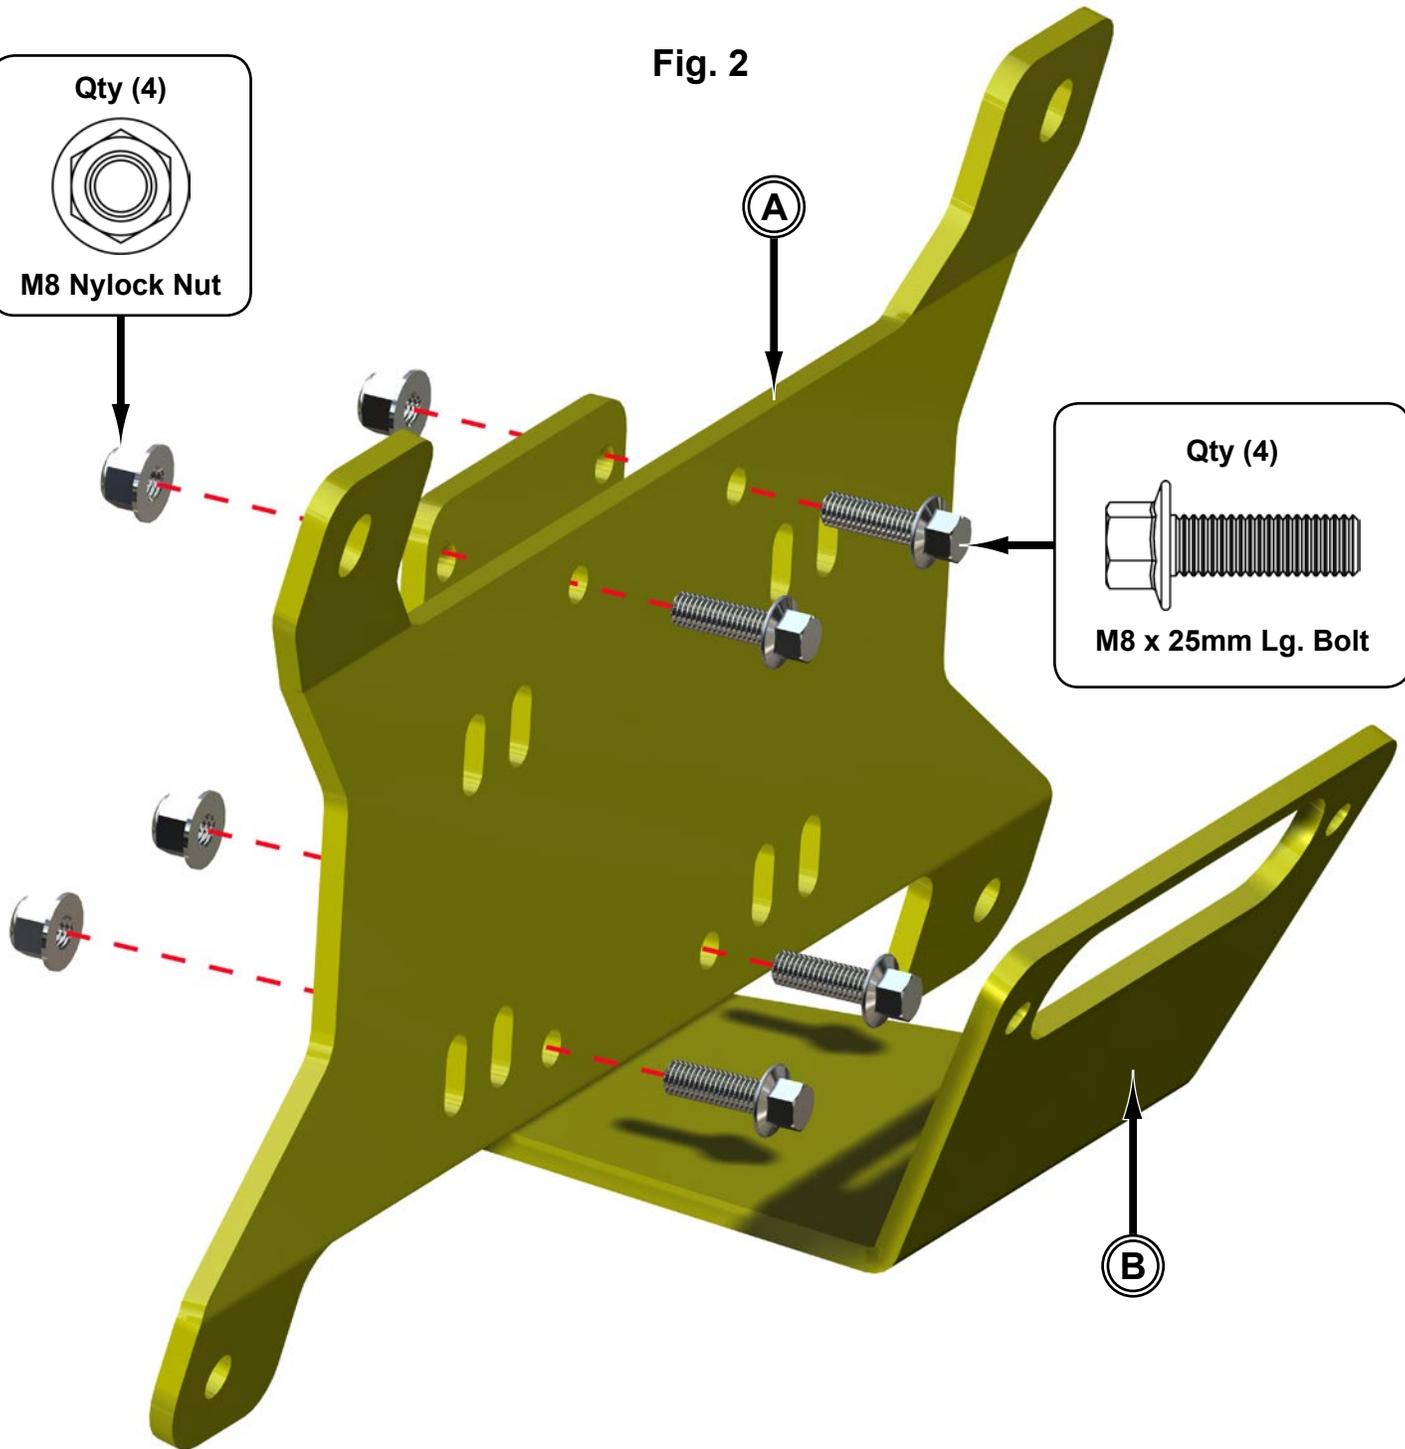


Fig. 3

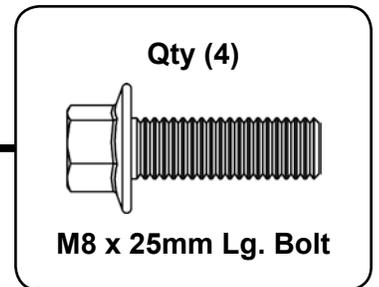

! *If installing SuperATV 3500 Lb. Winch, install Fairlead Mount Adapter (C) as shown.*

Fig. 4

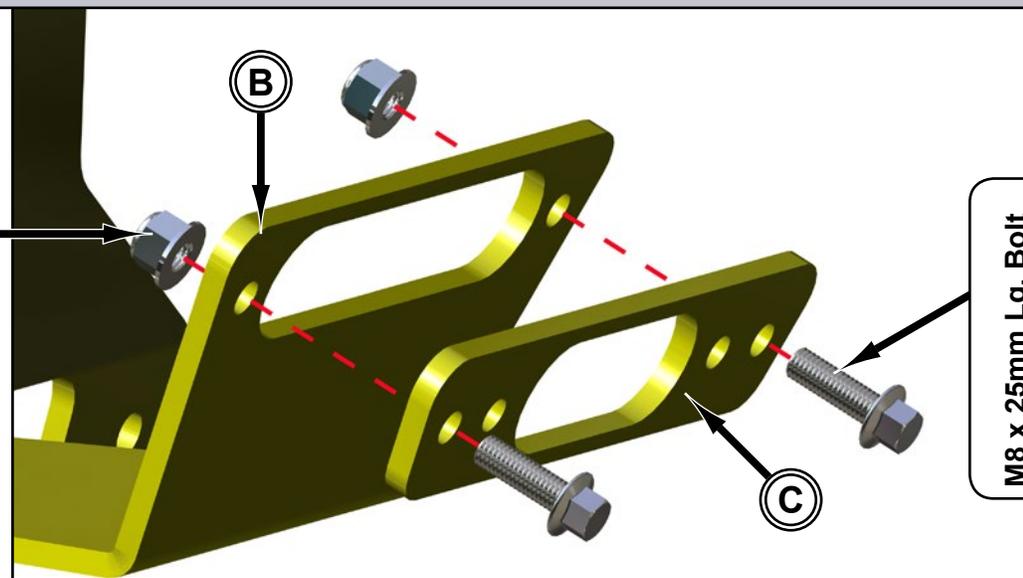

SuperATV Winch, item #4500-W-N, shown

Fig. 5



install to Winch Mount (A); hardware included with Winch

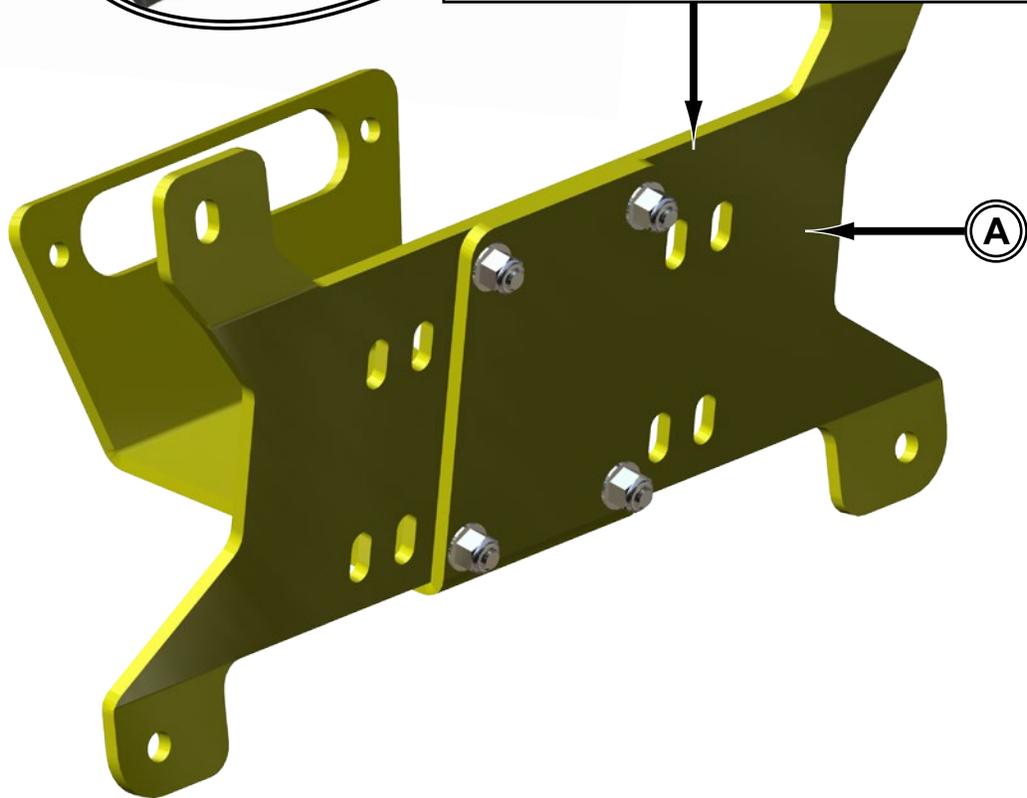


Fig. 6

(Driver Side)

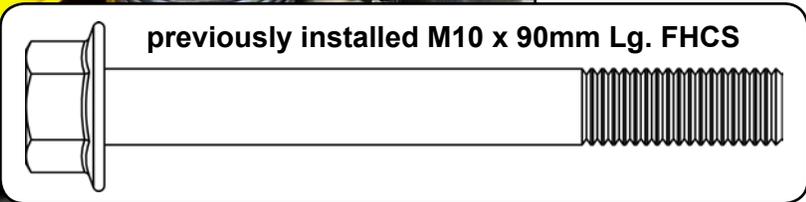
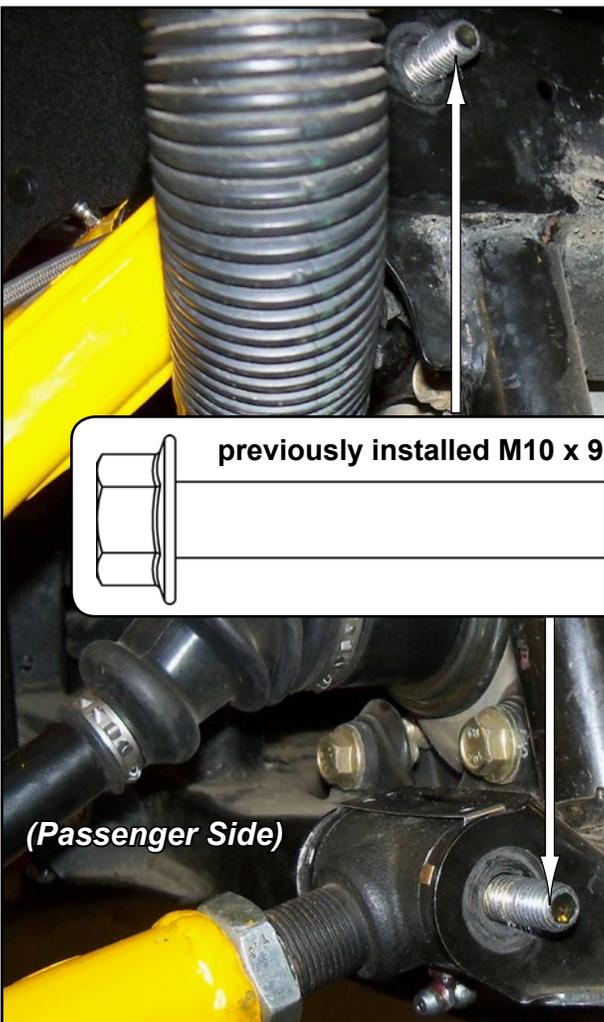


Fig. 6a



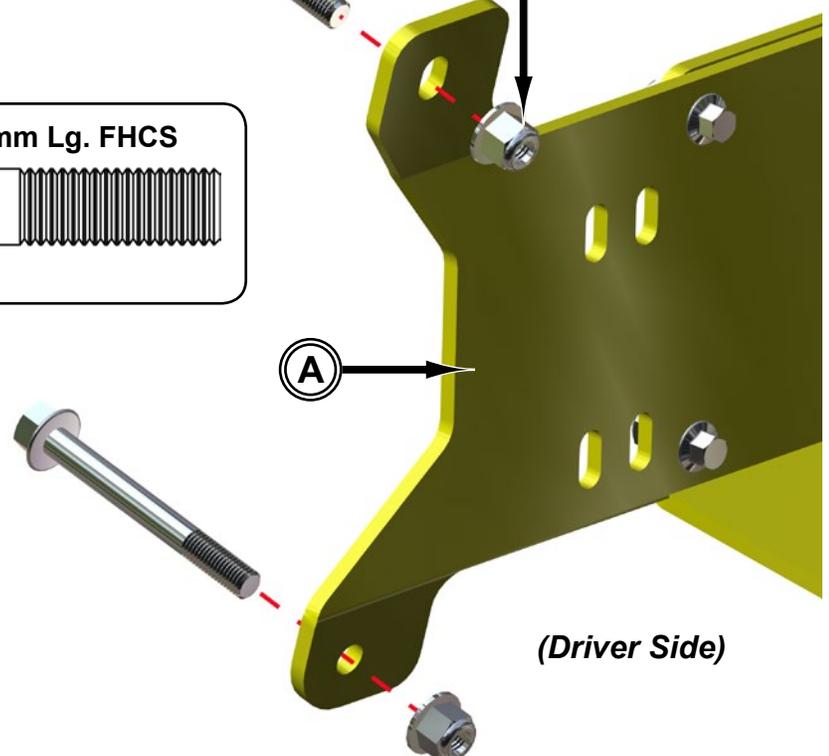


Fig. 6b



Qty (4)

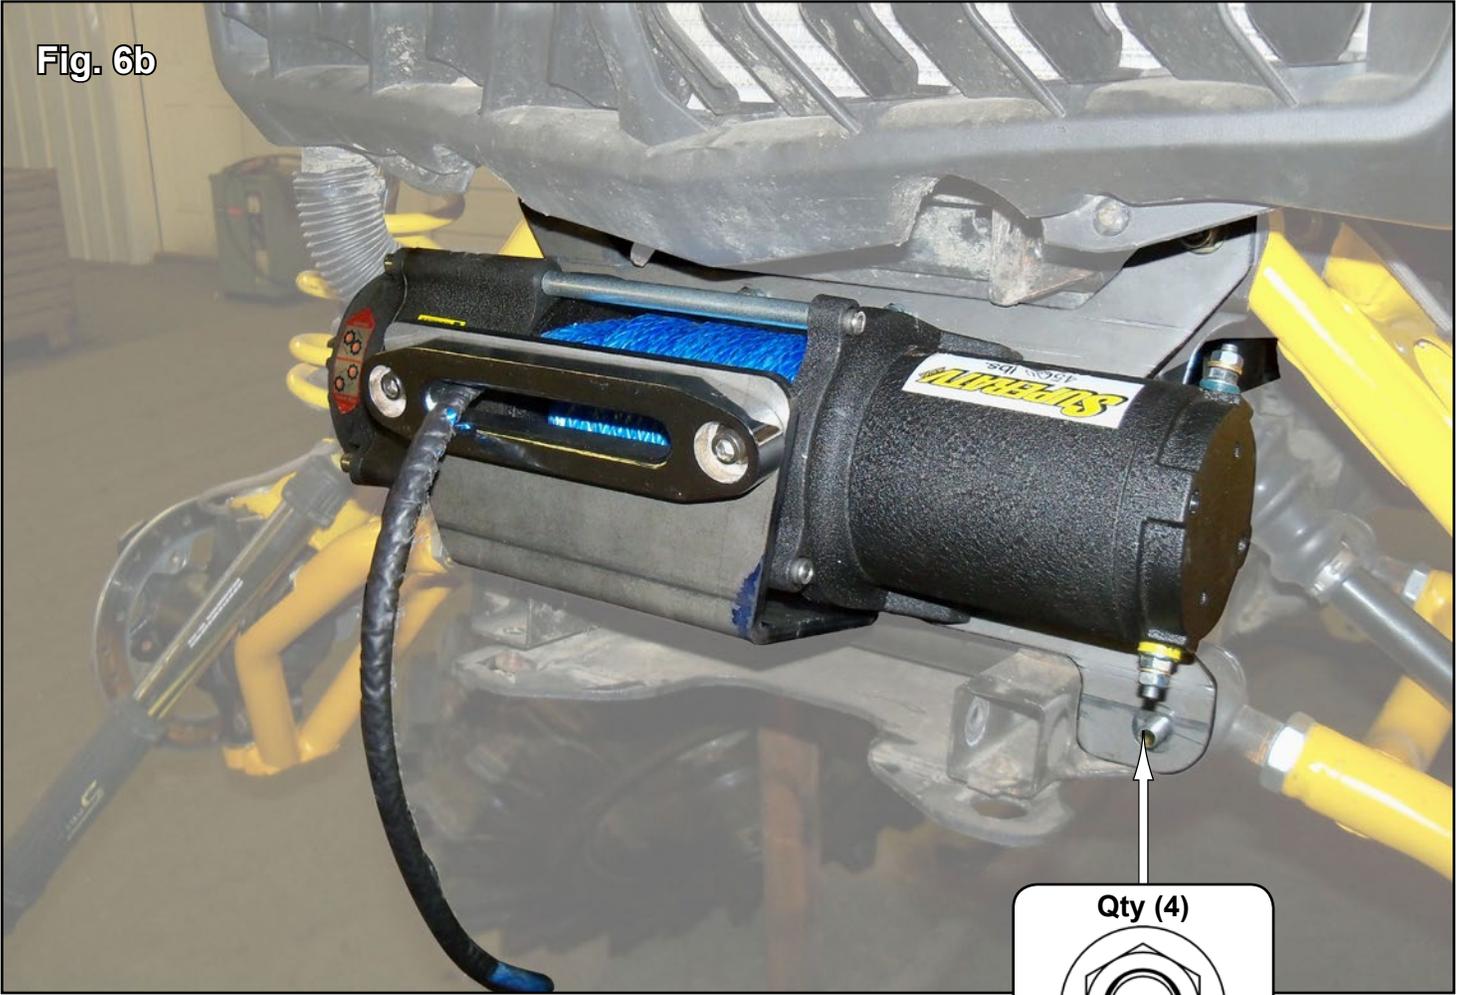

M10 Nylock Nut