
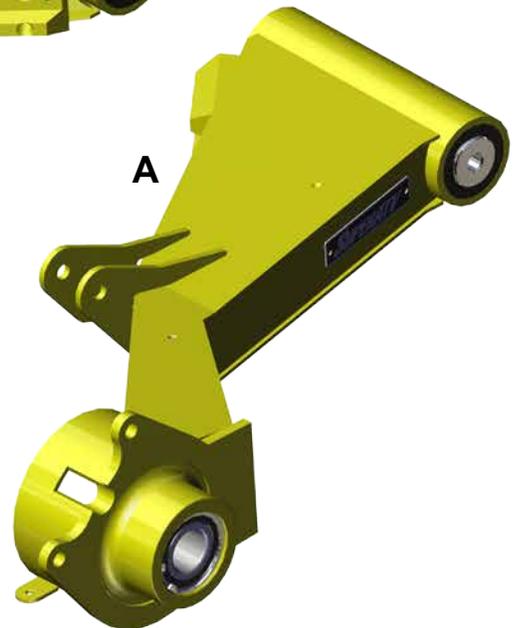
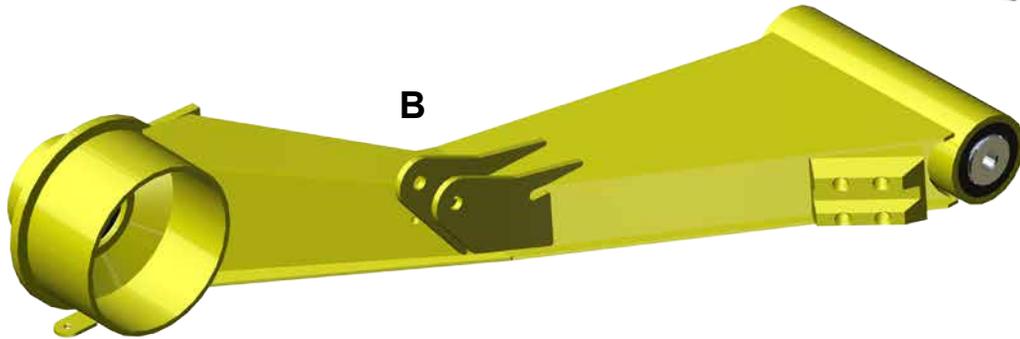



## INSTALLATION INSTRUCTIONS

### Can-Am Commander Rear Trailing Arms


Item	Description	Qty
A	Trailing Arm, Passenger	1
B	Trailing Arm, Driver	2
C	CV Guard Brackets	2
D	Brake Line Clips	2
E	CV Guard Clips	2
F	Mount Supports	2

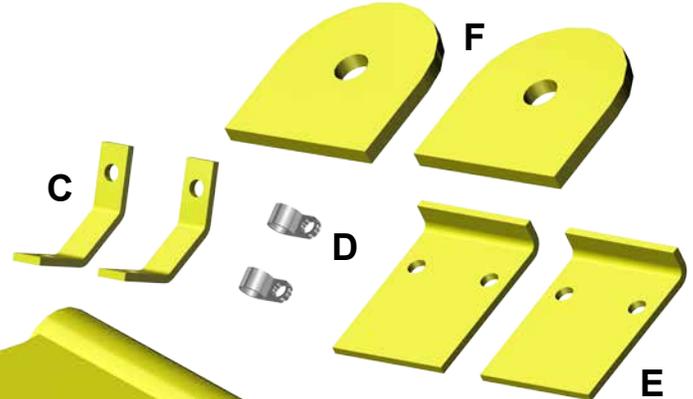

Qty (4)  M5-.80 x 25mm Lg. PHMS

Qty (10)  M5-.80 x 13mm Lg. PHMS

Qty (2)  M5-.80 Nylock Nut

Qty (4)  M5 Wide Flat Washer

**Read instructions and view illustrations before beginning.**

**Need help with your installation?**

 [sales@superatv.com](mailto:sales@superatv.com)  [www.superatv.com](http://www.superatv.com)

 1-812-574-7777  8:00am - 9:00pm EST M-Th  
8:00am - 7:00pm EST Friday  
9:00am - 2:00pm EST Saturday

*Thank You  
For Choosing*

# SUPERATV.COM

#### Liability Statement

SuperATV's products are designed to best fit users ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory, or aftermarket, parts will void any warranty provided by SuperATV and is not recommended. SuperATV's products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV to verify that they will work together.

Although SuperATV has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV products, user agrees that should damages occur, SuperATV will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.



SuperATV will warranty only parts provided by SuperATV. Any damage or problems with OEM housings, bearings, seals, or other manufacturers products will not be covered by SuperATV. SuperATV parts and products are not warranted if item was not installed properly, misused, or modified.

**Removal:** *Keep all components removed from machine.*

1. Raise rear of machine off ground, secure with jack stands, and remove Wheels.
2. On Passenger Side Trailing Arm, carefully drill out Rivets from Brakeline Clips.
  - Remove Caliper, Disc, Hubs, and Axle.
  - Unbolt Shock from Trailing Arm.
  - Repeat applicable steps for opposite side.
3. Unbolt Sway Bar from Trailing Arms.
4. Remove Trailing Arms from Frame.
5. From Trailing Arms carefully drill out CV Guards.

**Installation:** *Do not tighten hardware completely unless noted.*

1. Install new Axle. See Fig. 1.
  - Install Trailing Arm (A) or (B) and Mount Support (F) to Frame with stock hardware. See Figs. 1 - 1a.
  - Reinstall Sway Bar to Trailing Arm with stock hardware. See Fig. 2.
  - Reinstall Shock to Trailing Arm with stock hardware. See Fig. 4.
2. Repeat steps for opposite side.
3. Reinstall Discs, Calipers, and Hubs. See Fig. 4.
4. Install Brakeline Clips (D) to Brakeline and secure to Trailing Arm (A) with M5-.80 x 13mm Lg. PHMS. See Figs. 2 and 4.
5. Install CV Guard Clips (E) to Trailing Arms (A)(B) with M5-.80 x 25mm Lg. PHMS. See Fig. 5.
  - Install CV Guard Brackets (C) to Trailing Arms (A)(B) with M5-.80 x 13mm Lg. PHMS. See Fig. 5.
  - Install stock CV Guards as shown in Fig. 5a.

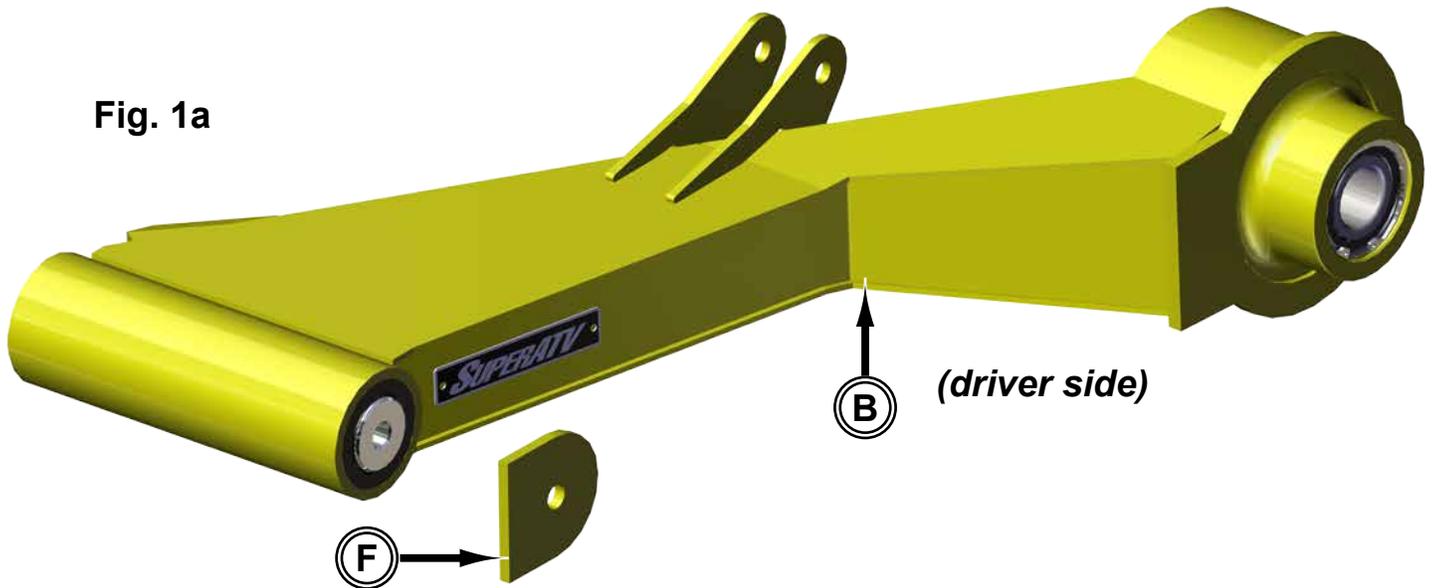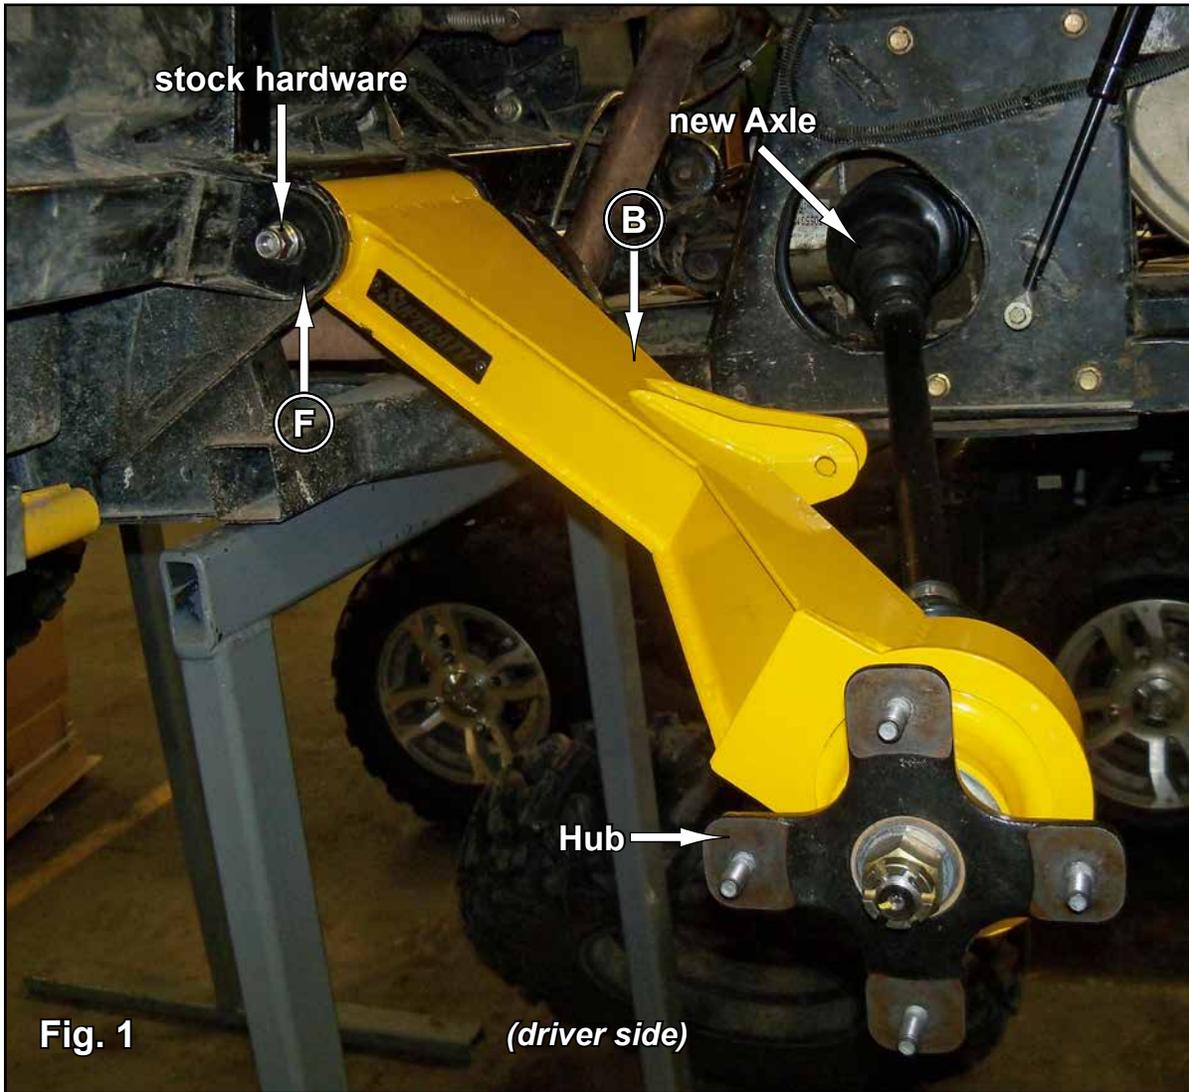

Qty (2)  
M5 x 13mm Lg.

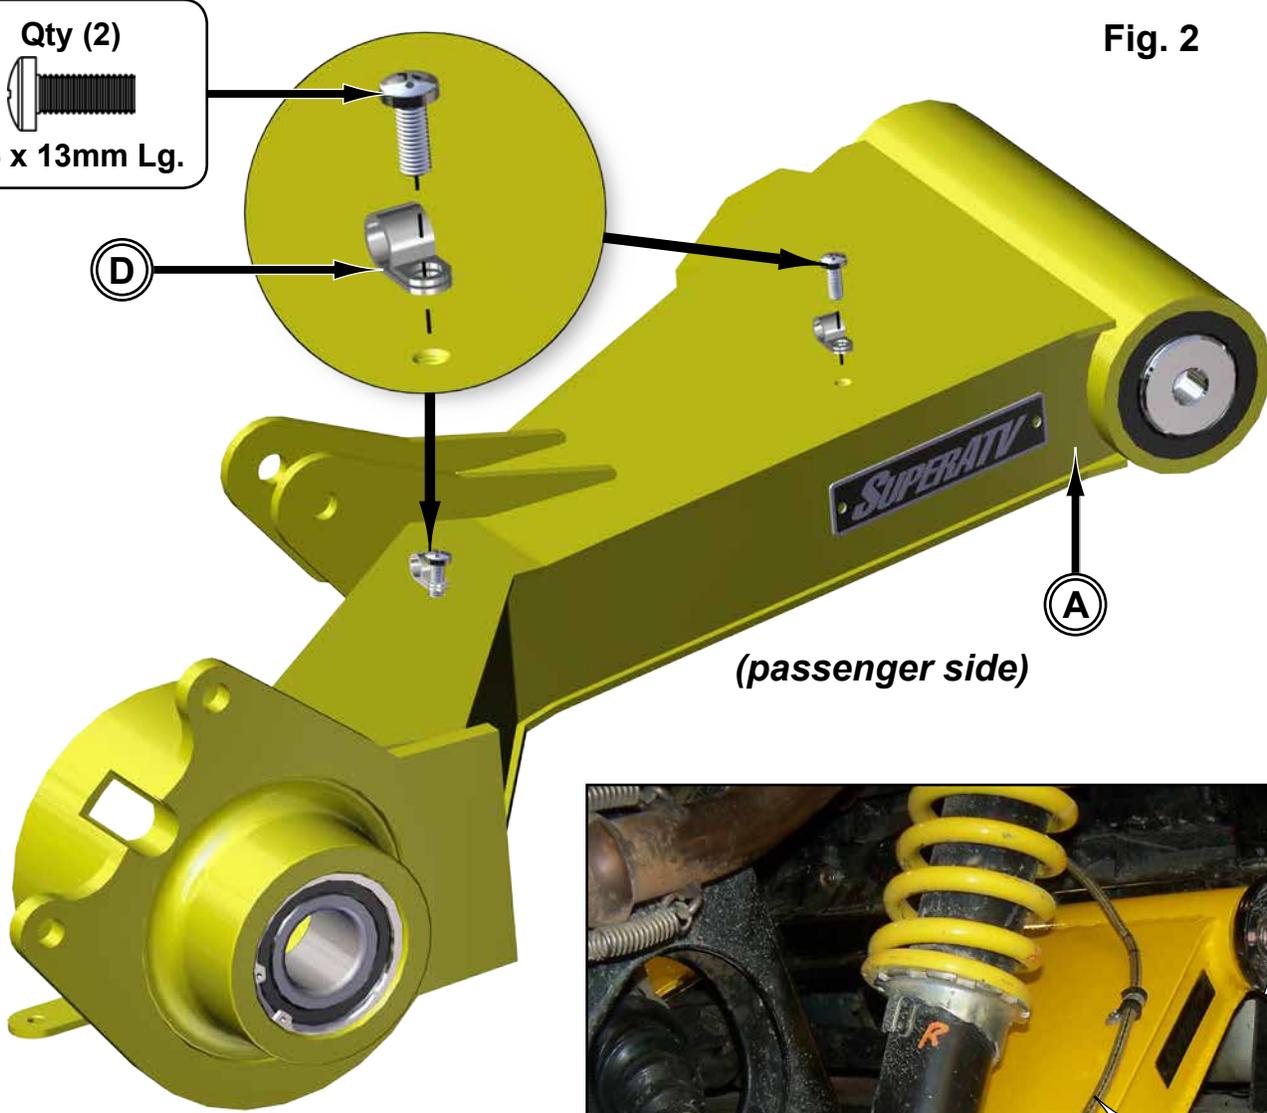


Fig. 2

(passenger side)

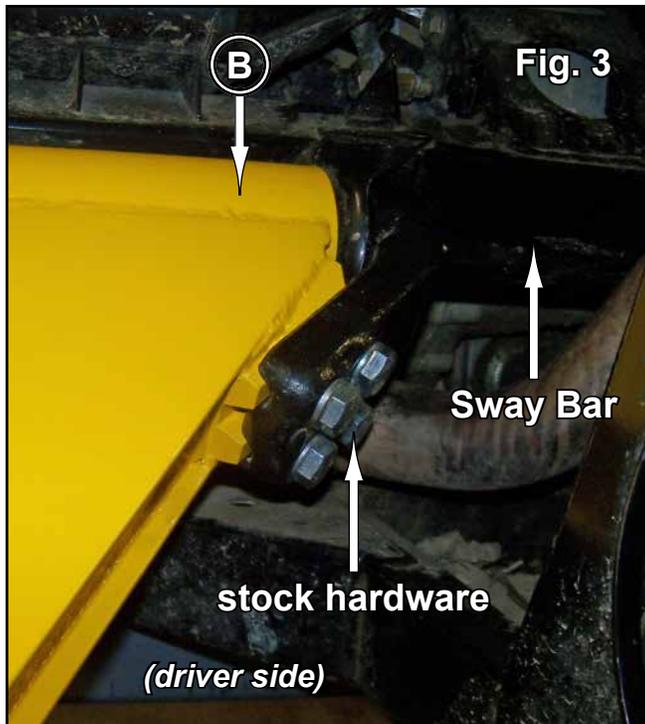


Fig. 3

(driver side)

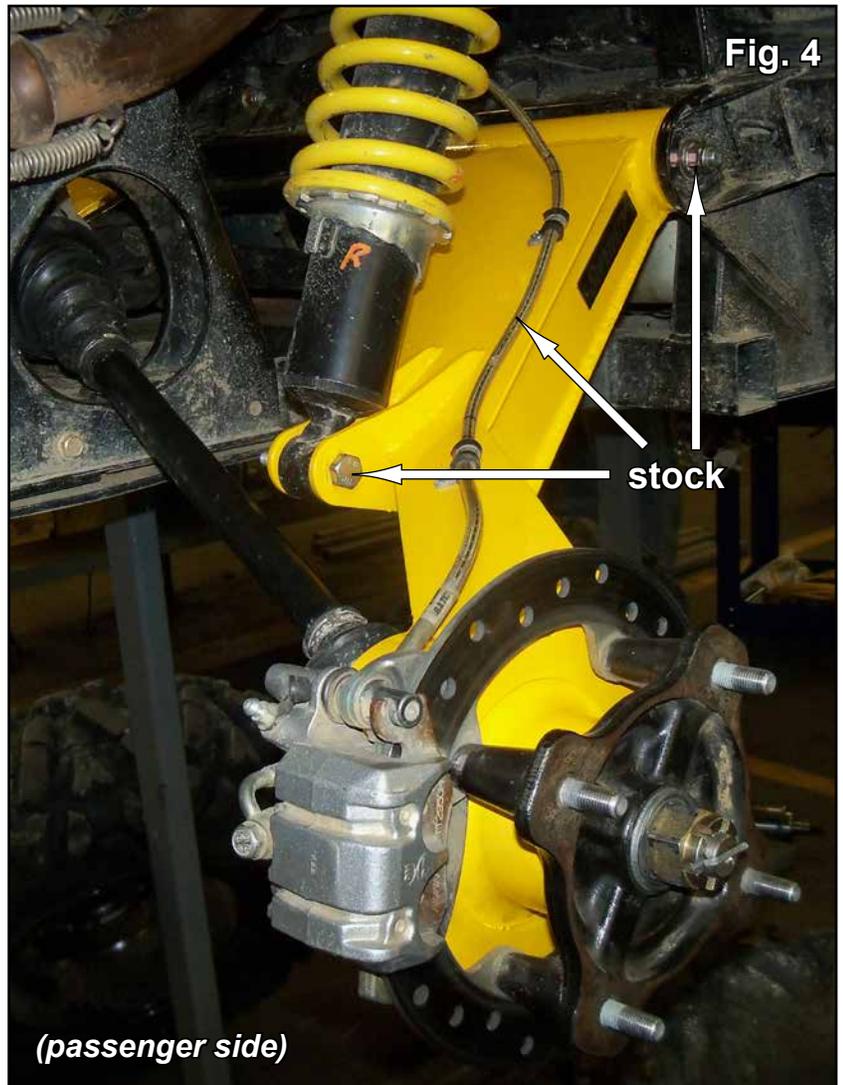


Fig. 4

(passenger side)

Fig. 5

