

INSTALLATION INSTRUCTIONS

Polaris RZR Nerf Bars

Item	Description	Qty
A	Nerf Bar, Left	1
B	Nerf Bar, Right	1
C	Mounting Brackets, Front	2
D	M8 x 20mm Lg. Bolt Kits (See Detail)	4
E	5/16"-18 x .95" Lg. Flange Head Thread Cutting Bolts	8



(D) Bolt Kit

Item	Description
A	M8 x 20mm Lg. Bolt
B	M8 Flat Washer
C	M8 Nylock Nut

A



B



C





Read instructions and view illustrations before beginning.

Need help with your installation?



sales@superatv.com



www.superatv.com



1-812-574-7777



8:00am - 9:00pm EST M-Th
8:00am - 7:00pm EST Friday
9:00am - 2:00pm EST Saturday

Liability Statement
 SuperATV's products are designed to best fit users ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory, or aftermarket, parts will void any warranty provided by SuperATV and is not recommended. SuperATV's products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV to verify that they will work together.

Although SuperATV has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV products, user agrees that should damages occur, SuperATV will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV will warranty only parts provided by SuperATV. Any damage or problems with OEM housings, bearings, seals, or other manufacturers products will not be covered by SuperATV. SuperATV parts and products are not warrantied if item was not installed properly, misused, or modified.

Thank You
For Choosing

Do not tighten hardware completely unless noted.





It may help to Pre-Tap holes even though Self Tapping Bolts are included with this kit.

1. Install Mounting Bracket (C) to frame with (2) 5/16"-18 x .95" Lg. Flange Head Thread Cutting Bolts (E). Mounting location is under machine, around front area of Seats. Look into front Wheel Well, towards Seat Floor Board area. See Fig. 1, Fig. 1a, and Viewing References.
2. Install rear of Nerf Bar (A) or (B) to frame with (2) 5/16"-18 x .95" Lg. Flange Head Thread Cutting Bolts (E). Mounting location is under machine, around rear area of Seats. Look into rear Wheel Well, towards Seat Floor Board area. See Fig. 2, Fig. 2a, and Viewing References.
3. Place Nerf Bar (A) or (B) on Mounting Bracket (C) and secure with (2) M8 x 20mm Lg. Bolts, Washers, and Nylock Nuts (D). See Fig. 3 and Fig. 1a.
4. Repeat steps for opposite side, align to machine, and tighten hardware.



PARTS REFERENCE

Item	Description
A	Nerf Bar, Left
B	Nerf Bar, Right
C	Mounting Brackets, Front
D	M8 x 20mm Lg. Bolt Kits (See Detail)
E	5/16"-18 x .95" Lg. Flange Head Thread Cutting Bolts

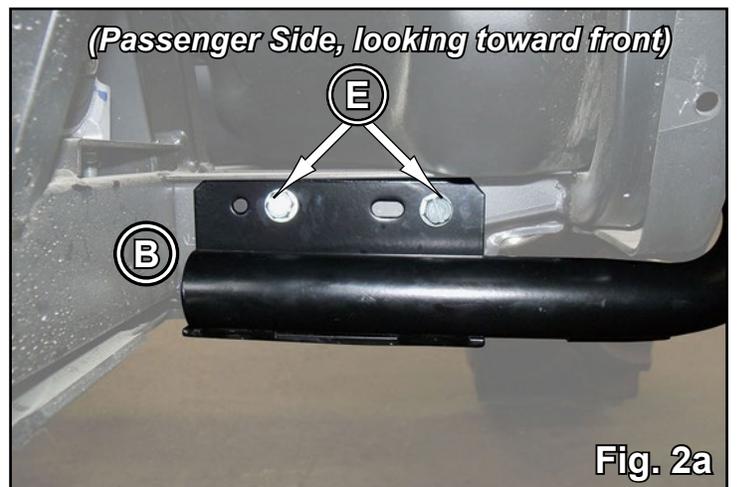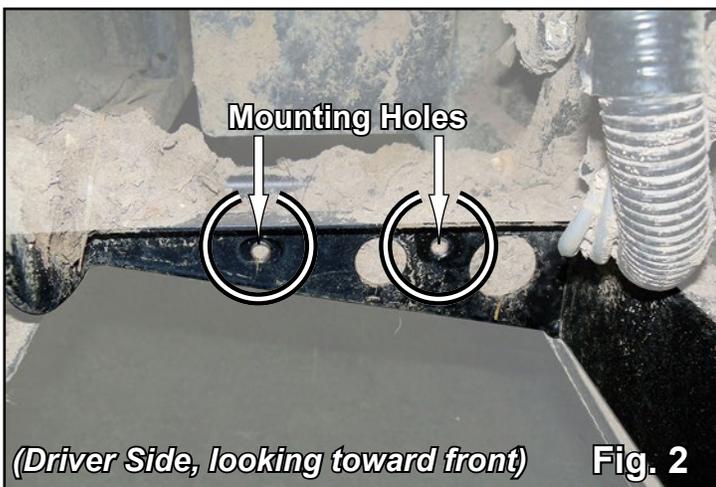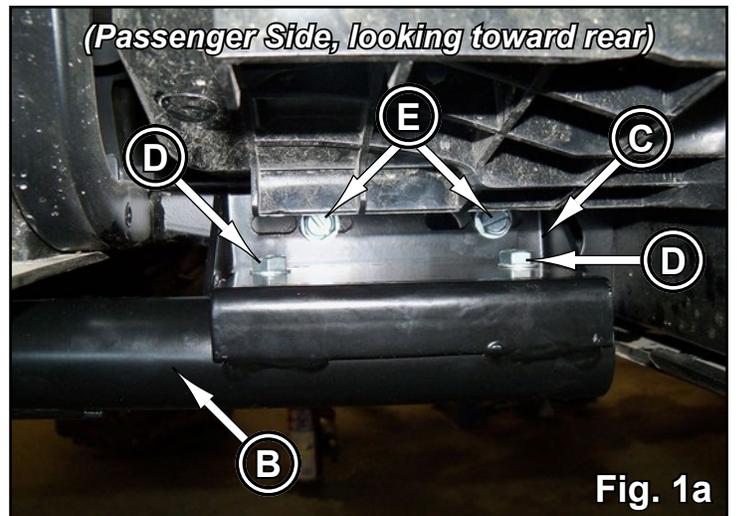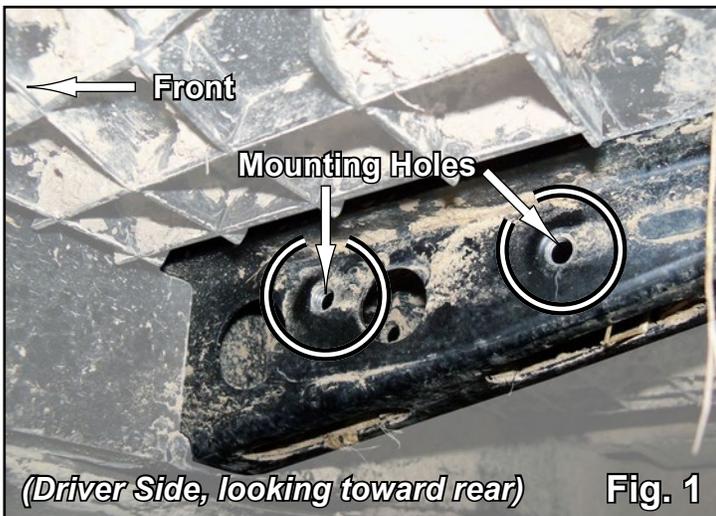

(illustrations continue on following page)



PARTS REFERENCE

Item	Description
A	Nerf Bar, Left
B	Nerf Bar, Right
C	Mounting Brackets, Front
D	M8 x 20mm Lg. Bolt Kits (See Detail)
E	5/16"-18 x .95" Lg. Flange Head Thread Cutting Bolts

