



Item	Description	Qty
A	Front Brackets	2
B	Rear Brackets	2 Pr
C	Support Bar	1

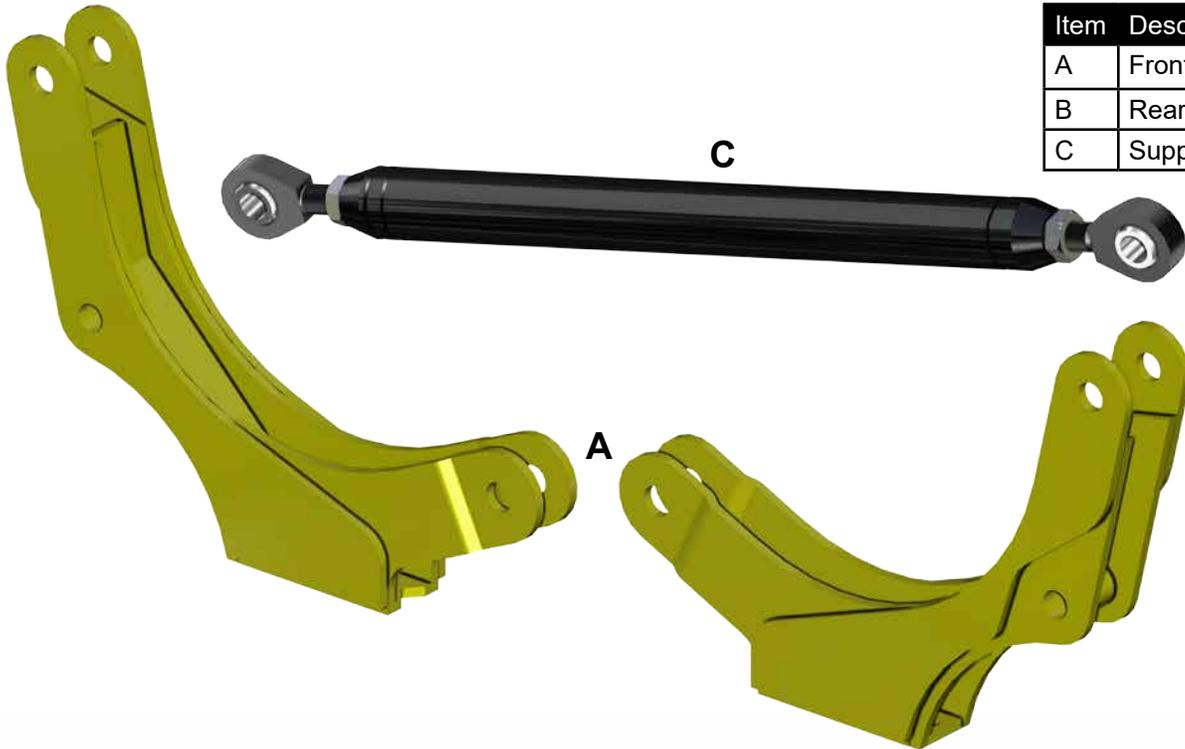

Rear Brackets (B) Layout

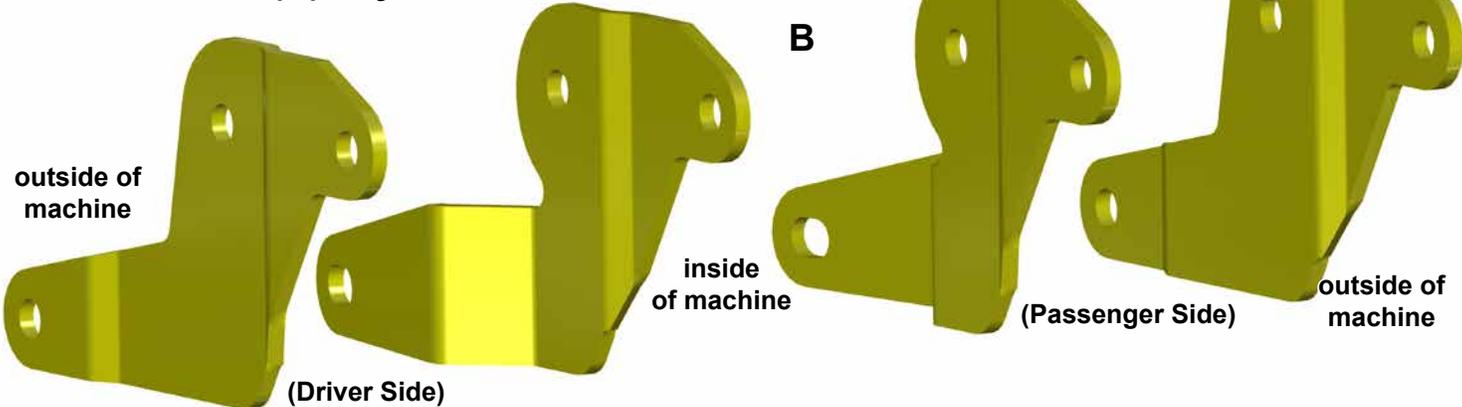

Read instructions and view illustrations before beginning.

Need help with your installation?

sales@superatv.com
www.superatv.com

1-812-574-7777
 8:00am - 9:00pm EST M-Th
 8:00am - 7:00pm EST Friday
 9:00am - 2:00pm EST Saturday

Liability Statement
 SuperATV's[®] products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV[®] and is not recommended. SuperATV's[®] products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV[®] to verify that they will work together.







Although SuperATV[®] has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV[®] urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV[®] products, user agrees that should damages occur, SuperATV[®] will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV[®], nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV[®]. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV[®] will warranty only parts provided by SuperATV[®]. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV[®]. SuperATV[®] parts and products are not warranted if item was not installed properly, misused, or modified.

Thank You
For Choosing
SUPERATV.COM[®]

(kit contents continued)

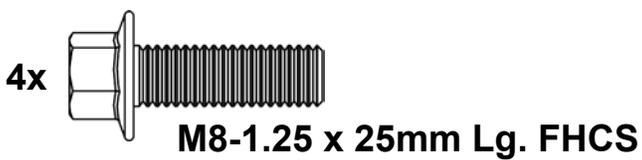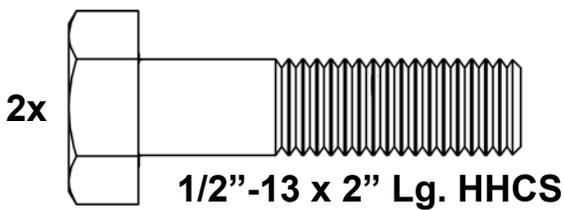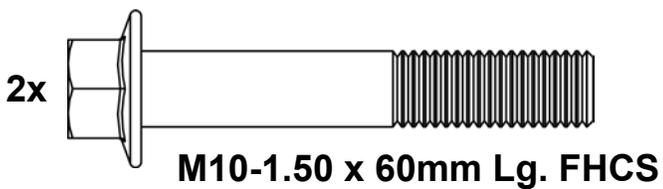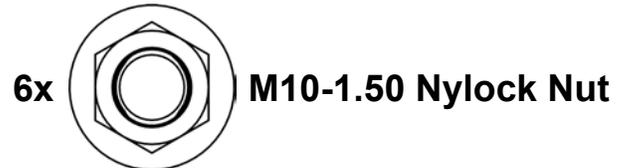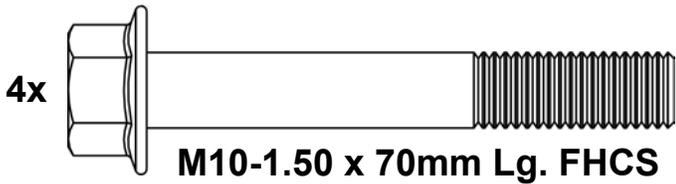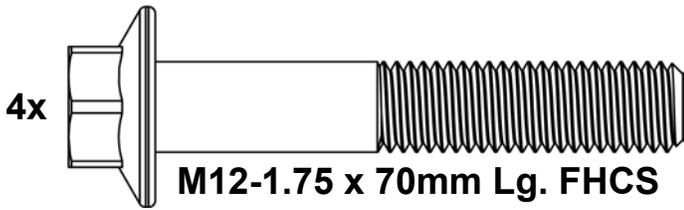

some hardware may be left over; discard

Front Removal: *Keep all components removed from machine.*




- Install Front Brackets (A) to Frame; See following page.




Front installation: Do not tighten hardware completely unless noted.

- Install Front Brackets (A) to Frame with hardware shown.
- 2014+ Models will use M12-1.75 x 70mm Lg. FHCS and M12-1.75 Nylock Nuts.
- Repeat for opposite side.

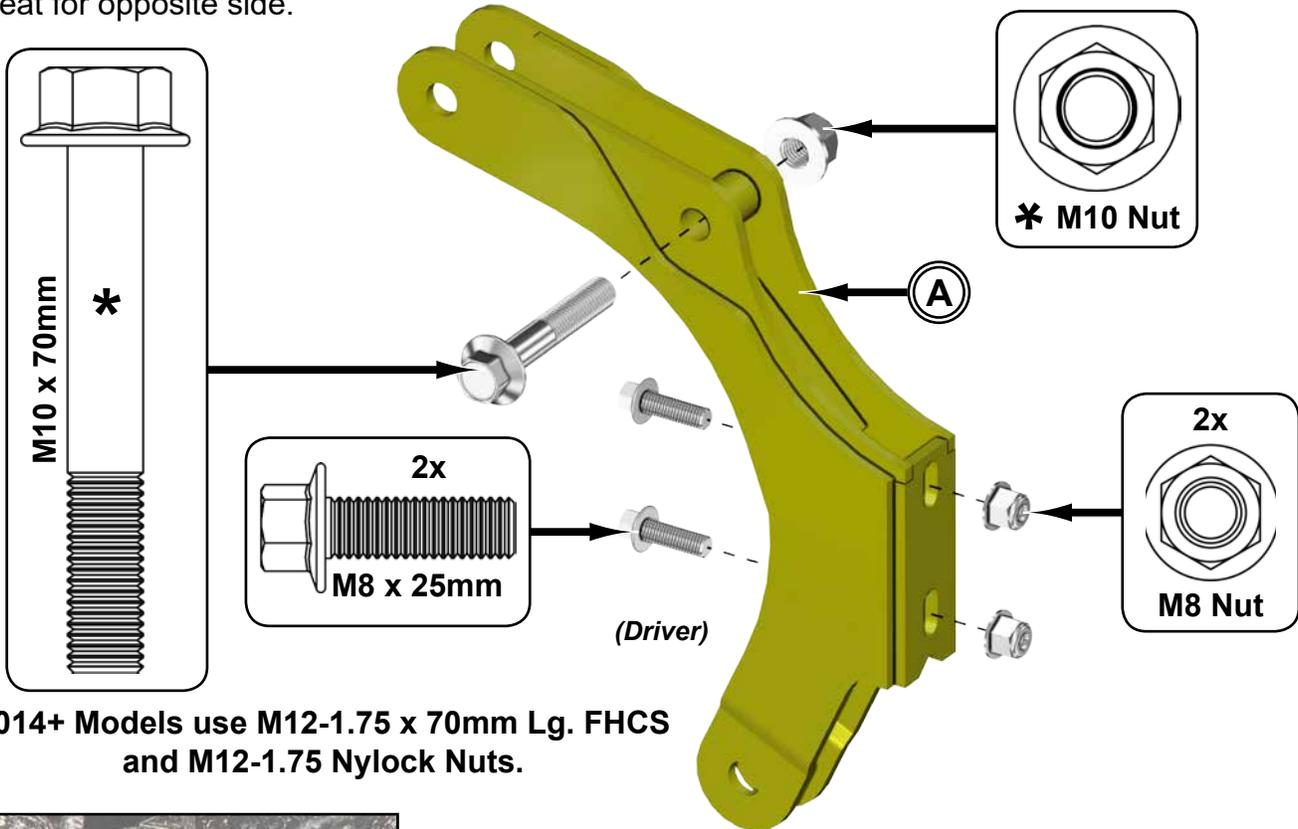


* 2014+ Models use M12-1.75 x 70mm Lg. FHCS and M12-1.75 Nylock Nuts.

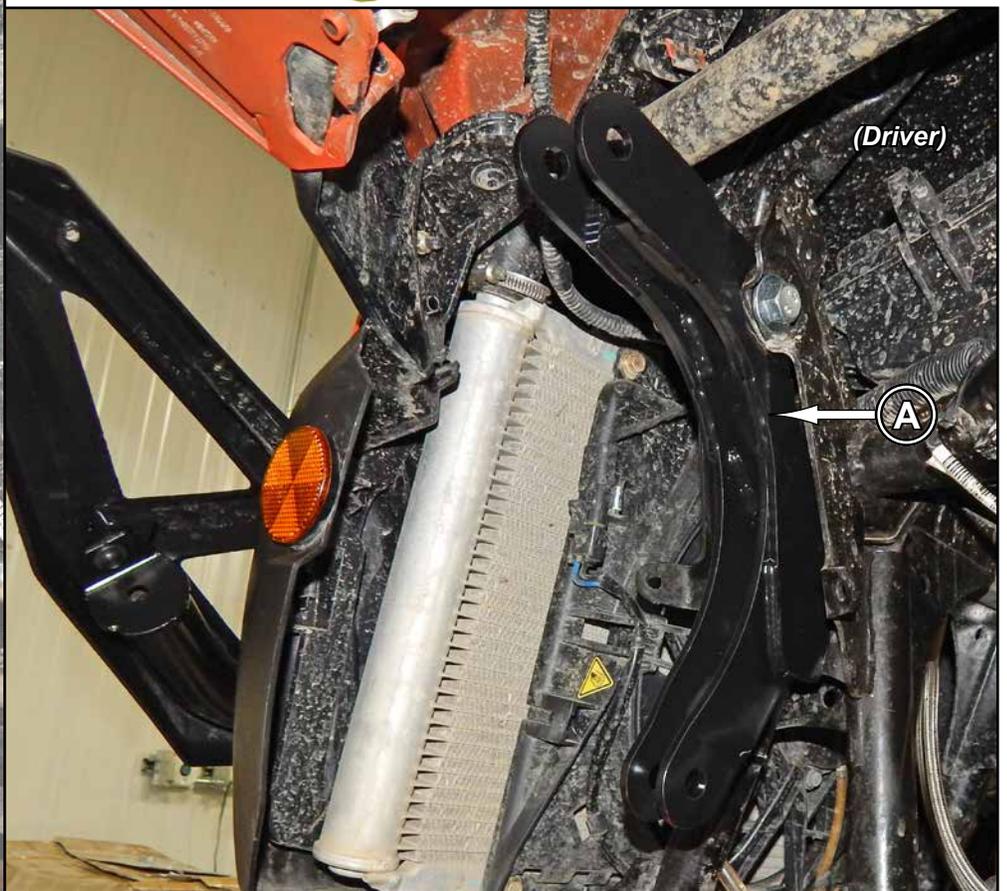

Tighten hardware completely.

Front installation continued: *Do not tighten hardware completely unless noted.*


- Measure distance between Front Brackets (A) as shown and set Support Bar (C) to that dimension.
- Install Support Bar (C) to Front Brackets (A) with hardware shown.

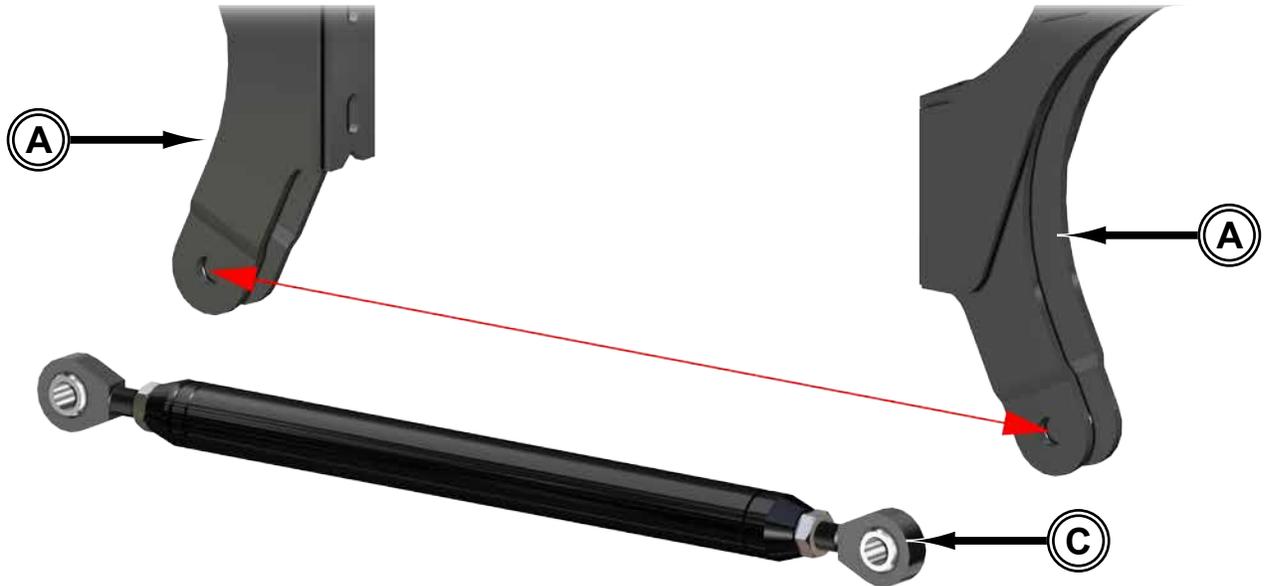

Tighten hardware completely.

Front installation continued: *Do not tighten hardware completely unless noted.*


- Install Shocks to Front Brackets (A) with stock hardware.
- Tighten hardware completely.

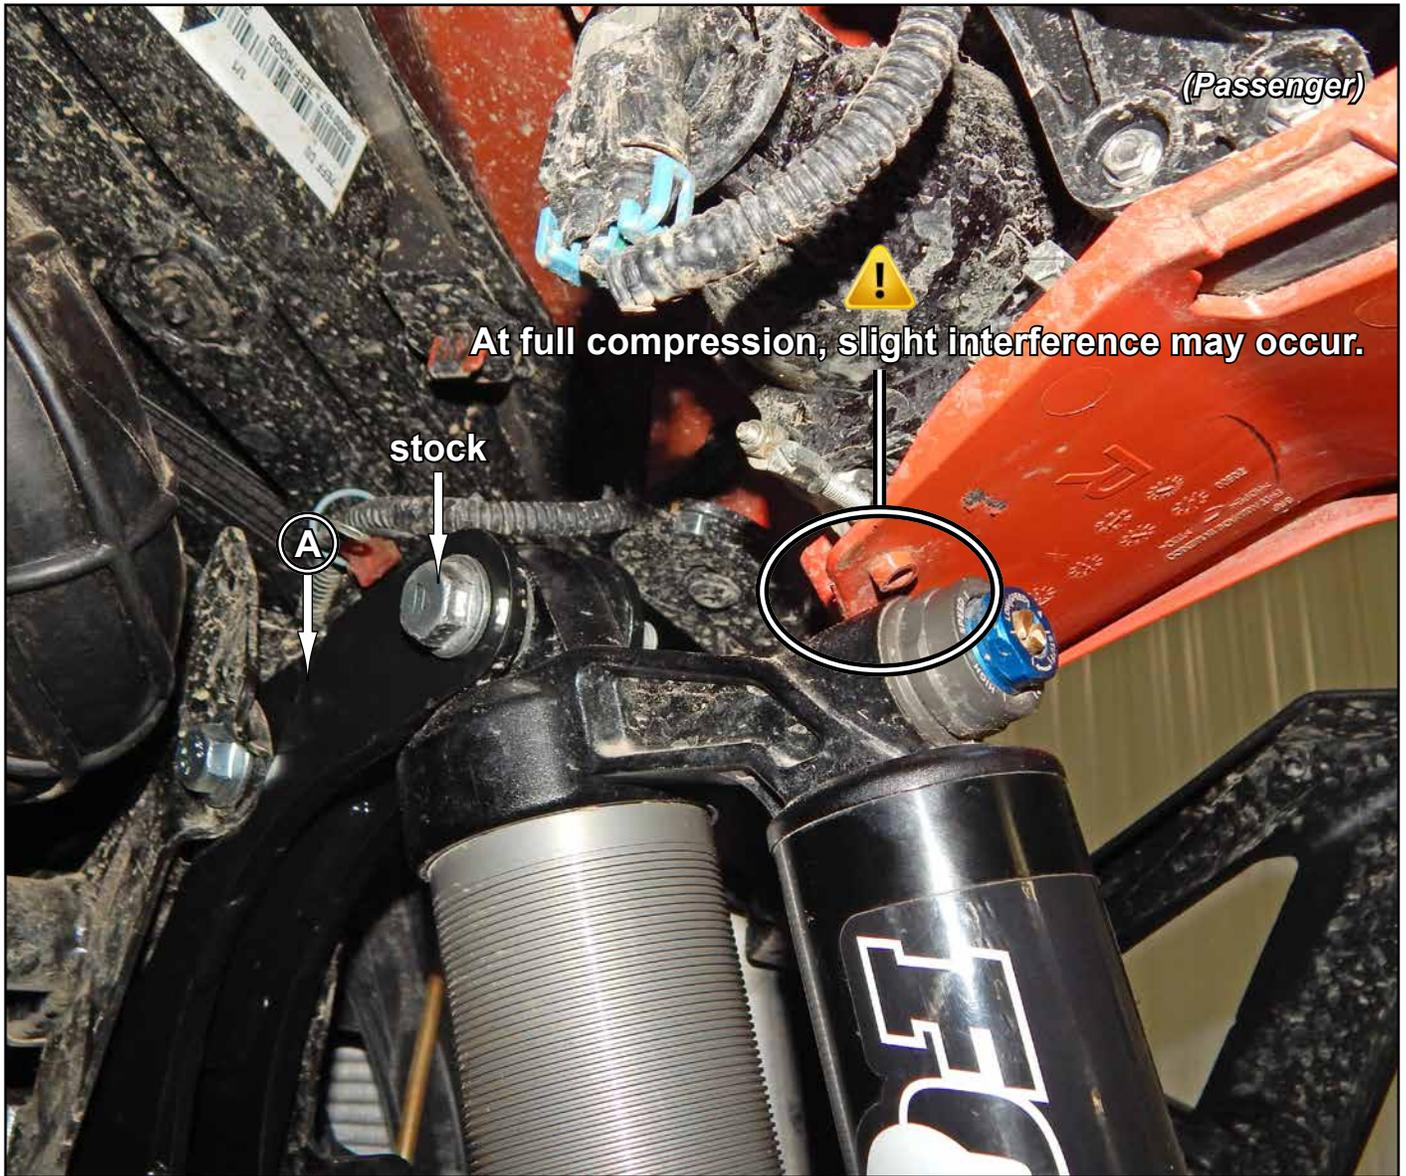

Rear Removal: *Keep all components removed from machine.*




- Install Rear Brackets (B) to Frame; See following page.

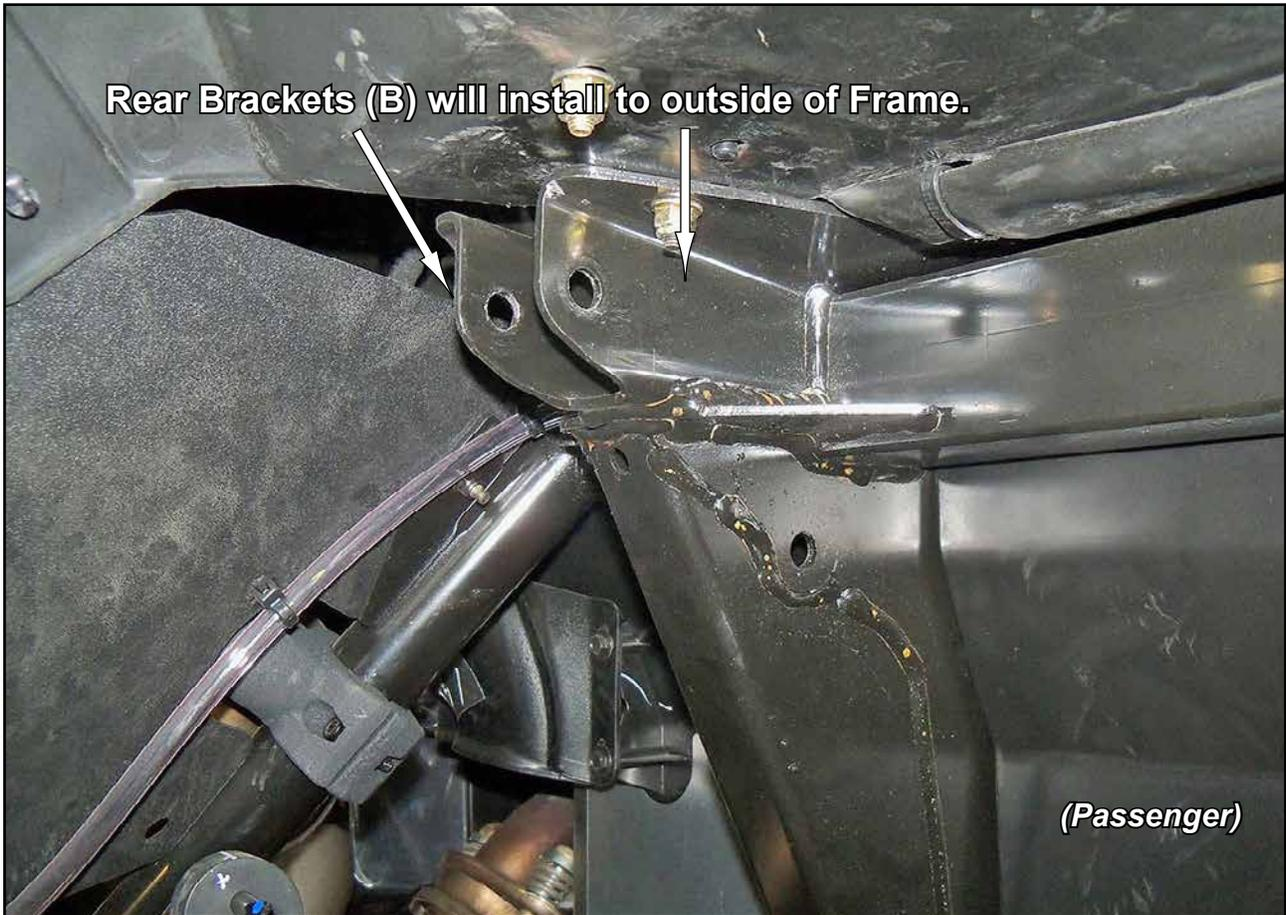


Rear installation: Do not tighten hardware completely unless noted.

- Install Rear Brackets (B) to Frame with hardware shown.
- 2014+ Models will use M12-1.75 x 70mm Lg. FHCS and M12-1.75 Nylock Nuts.
- Repeat for opposite side.

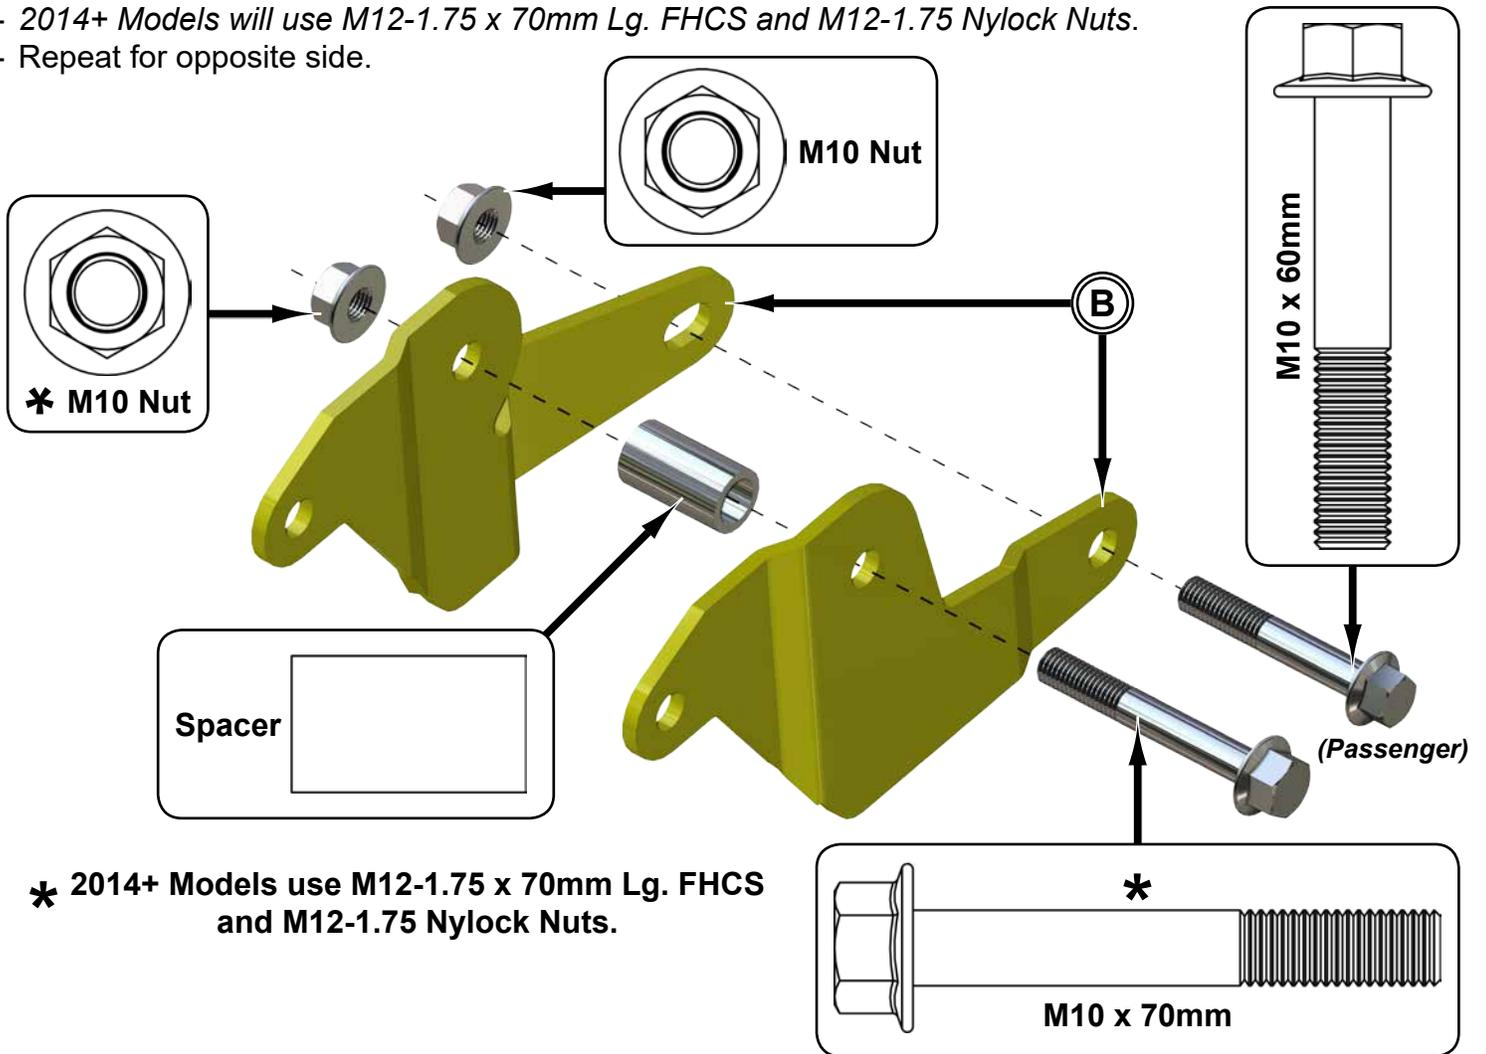

* 2014+ Models use M12-1.75 x 70mm Lg. FHCS and M12-1.75 Nylock Nuts.

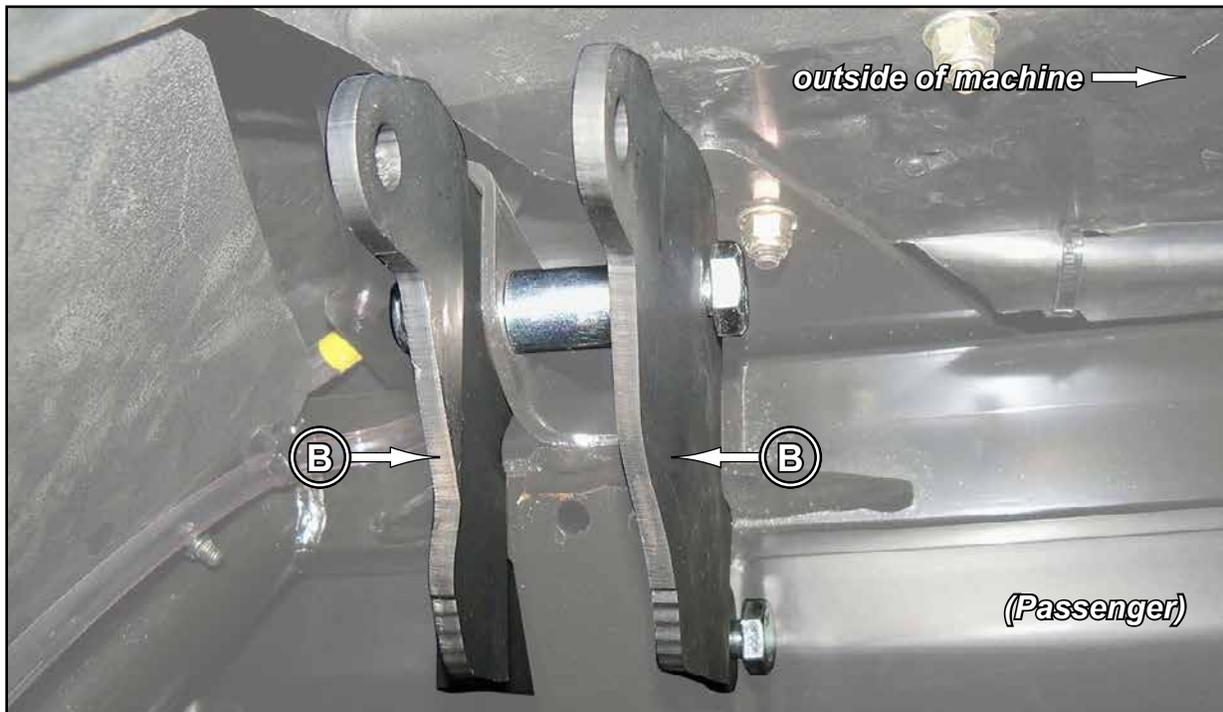

Rear installation continued: *Do not tighten hardware completely unless noted.*

- Reinstall Shocks to Rear Brackets (B) with stock hardware.

