



Item	Description	Qty
A	Winch Plate	1
B	Mounting Bracket (Passenger Side)	1
C	Mounting Bracket (Driver Side)	1

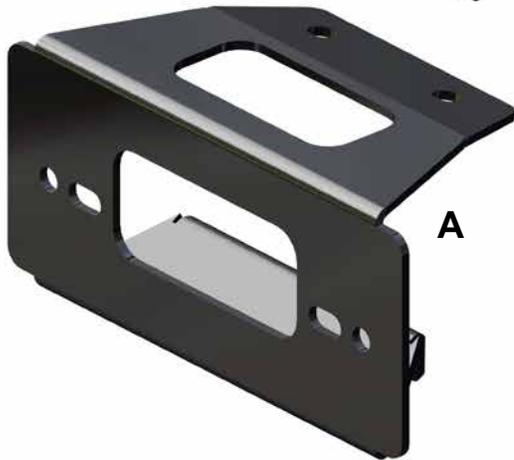

Qty (2)



M10 x 20mm Lg. HHCS

Qty (4)




M8 x 20mm Lg. HHCS

Qty (4)



M8 Nylock Nut

Qty (2)



M10 x 20mm Lg. SHCS

Read instructions and view illustrations before beginning.

Need help with your installation?



sales@superatv.com



www.superatv.com



1-812-574-7777



8:00am - 9:00pm EST M-Th
8:00am - 7:00pm EST Friday
9:00am - 2:00pm EST Saturday

Thank You

For Choosing

SUPERATV.COM

Liability Statement

SuperATV's products are designed to best fit users ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory, or aftermarket, parts will void any warranty provided by SuperATV and is not recommended. SuperATV's products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV to verify that they will work together.

Although SuperATV has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV products, user agrees that should damages occur, SuperATV will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV will warranty only parts provided by SuperATV. Any damage or problems with OEM housings, bearings, seals, or other manufacturers products will not be covered by SuperATV. SuperATV parts and products are not warranted if item was not installed properly, misused, or modified.

Do not tighten hardware completely unless noted.

1. Install rear sections of Mounting Brackets (B)(C) with M10 x 20mm Lg. HHCS. See Figs. 1 - 1b. Front sections of Mounting Brackets (B)(C) install with M10 x 20mm Lg. SHCS.
2. Install Winch Plate (A) with M8 x 20mm Lg. HHCS and M8 Nylock Nuts. See Figs. 2 - 2c.
3. Install Fairlead (supplied with Winch) to Winch Plate (A). *Hardware included with Winch.*
3. Tighten all hardware completely.
4. See "Winch Mounting Locations" and install Winch. Wire according to Winch Instructions.









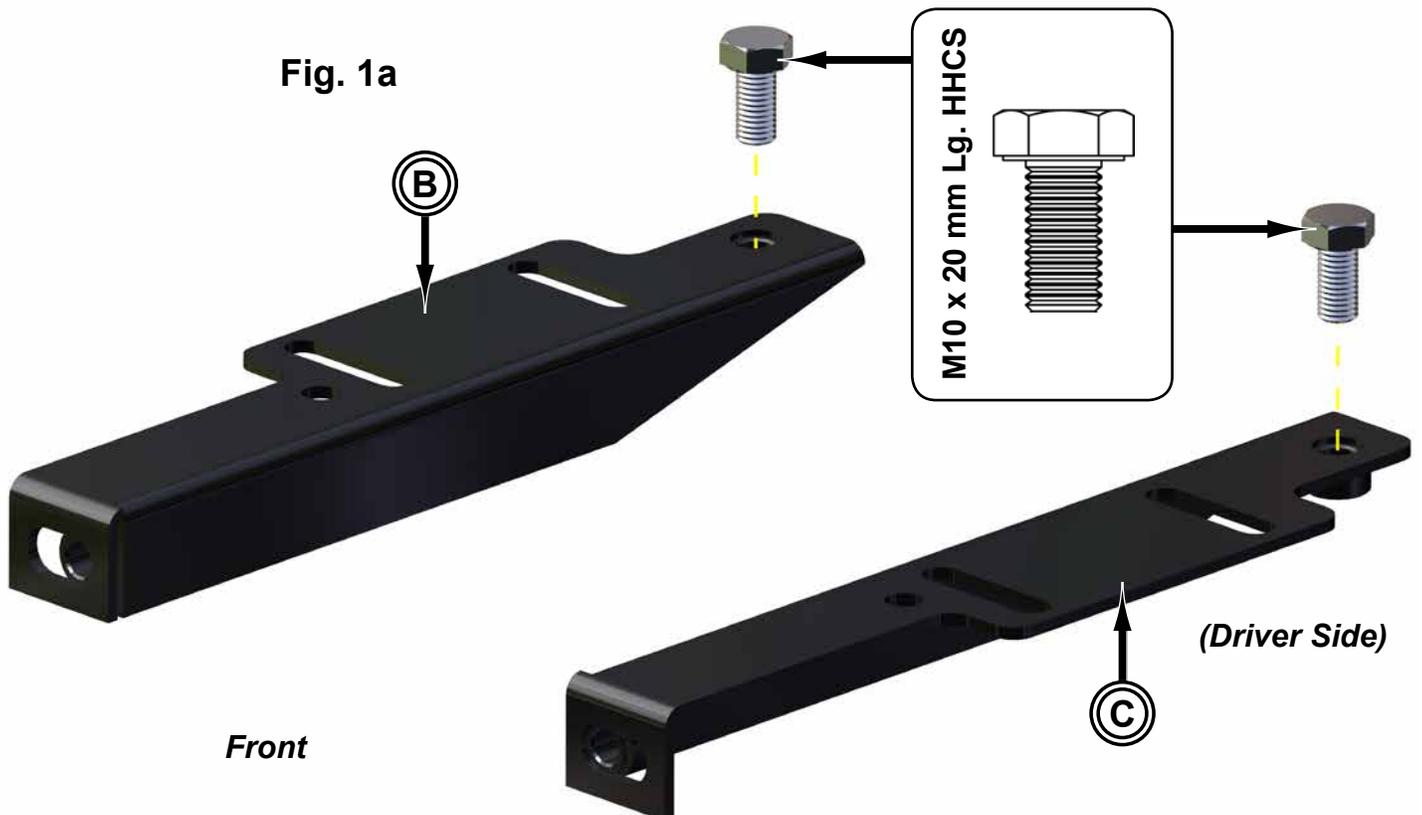


Fig. 1b

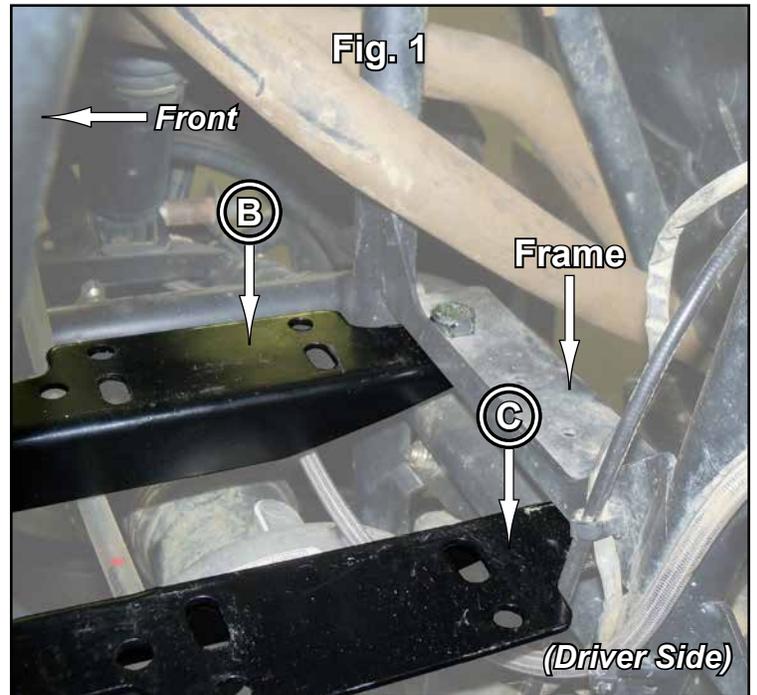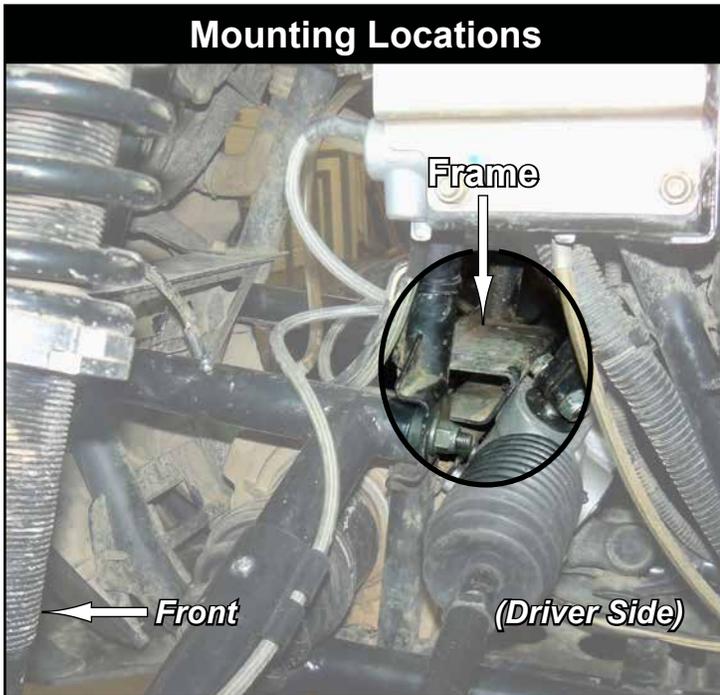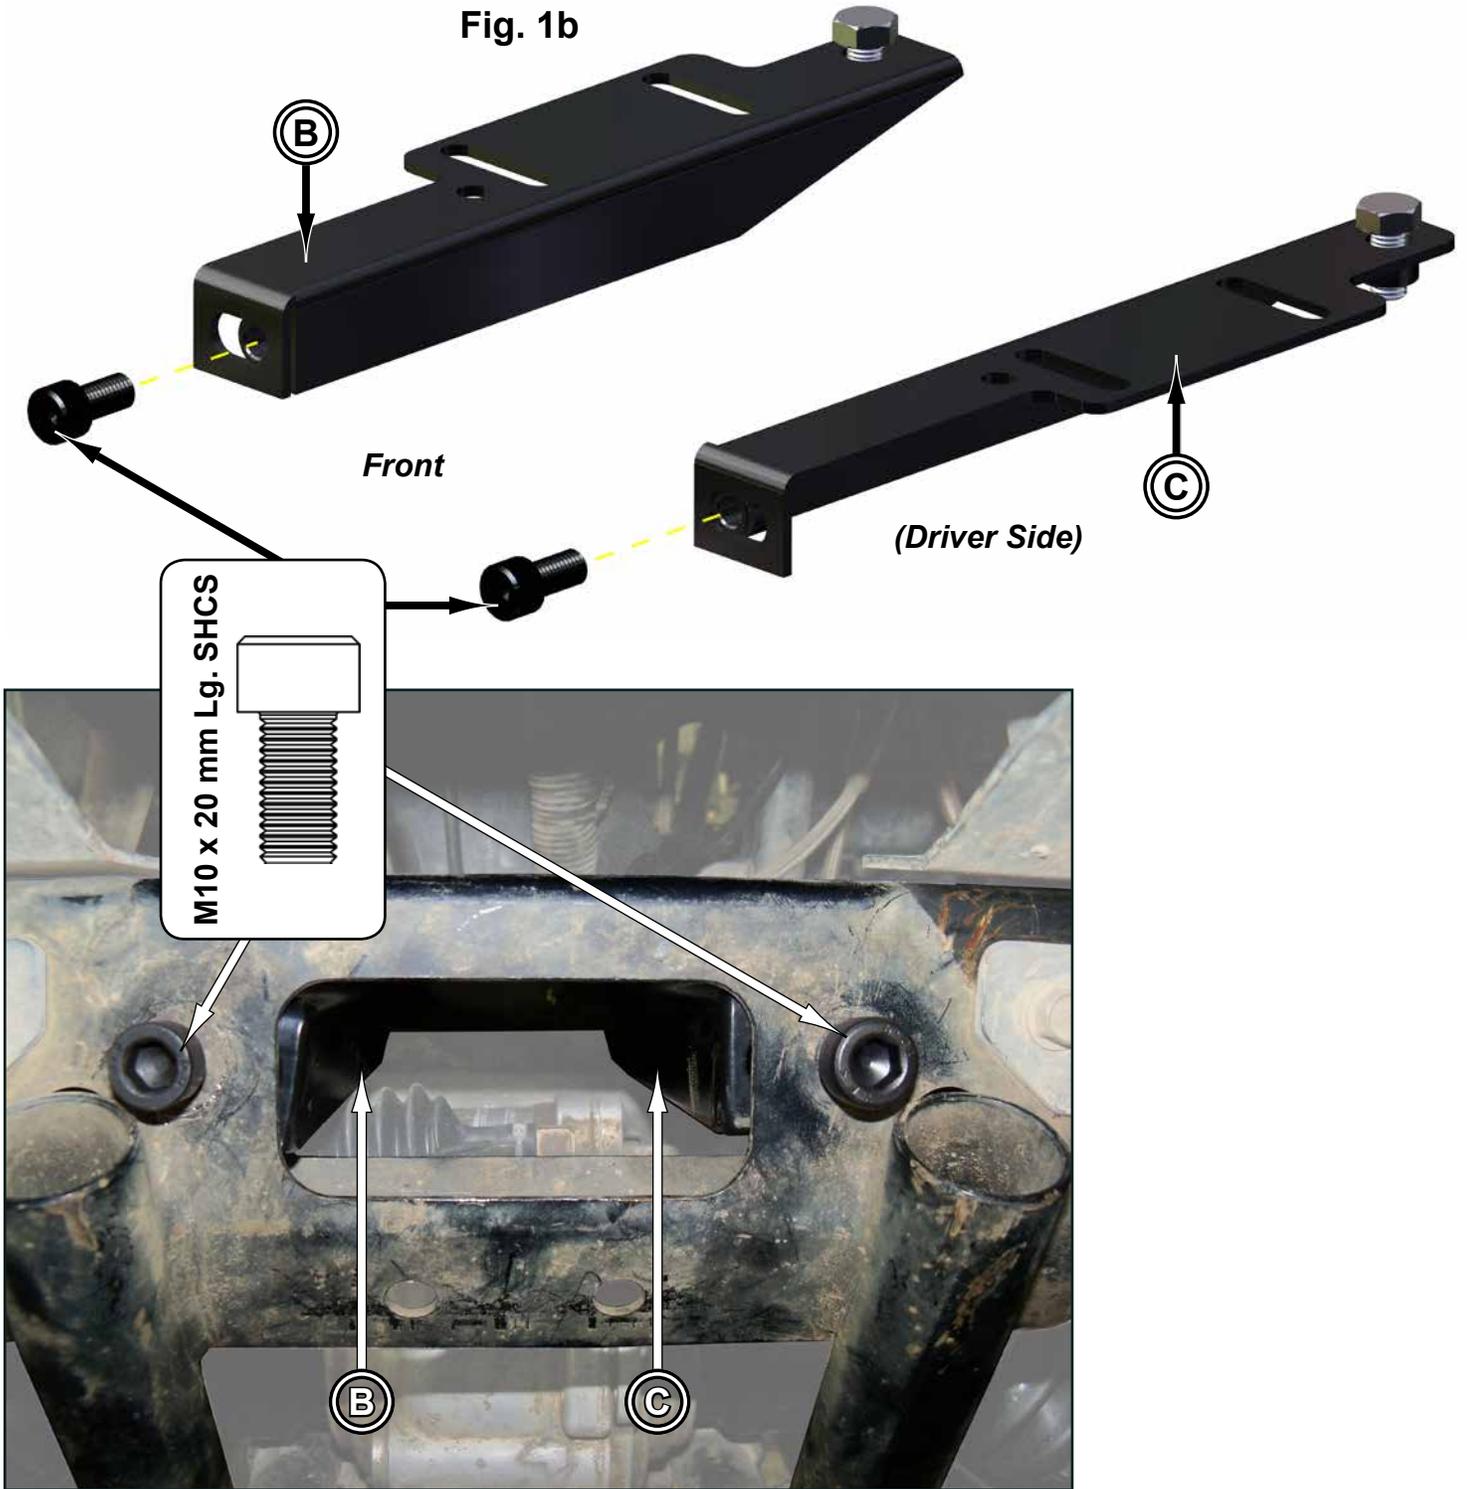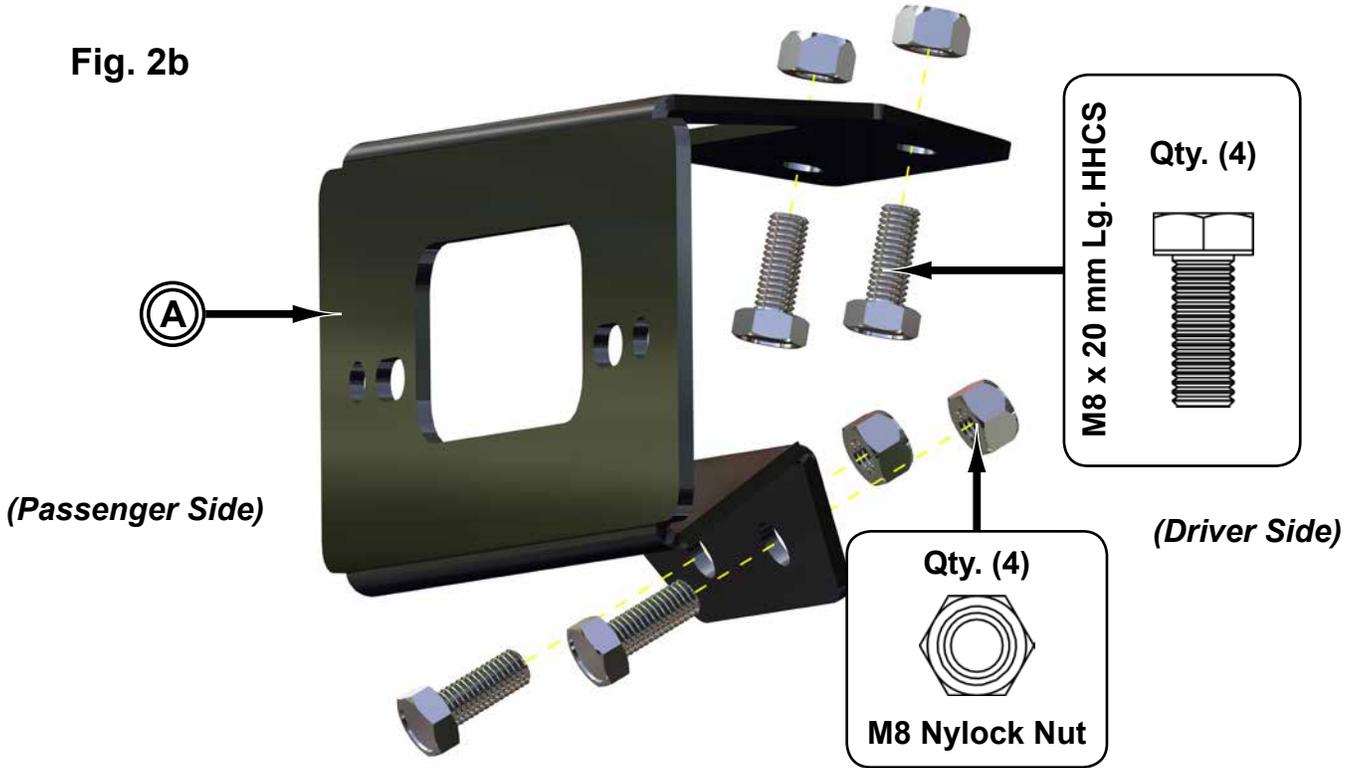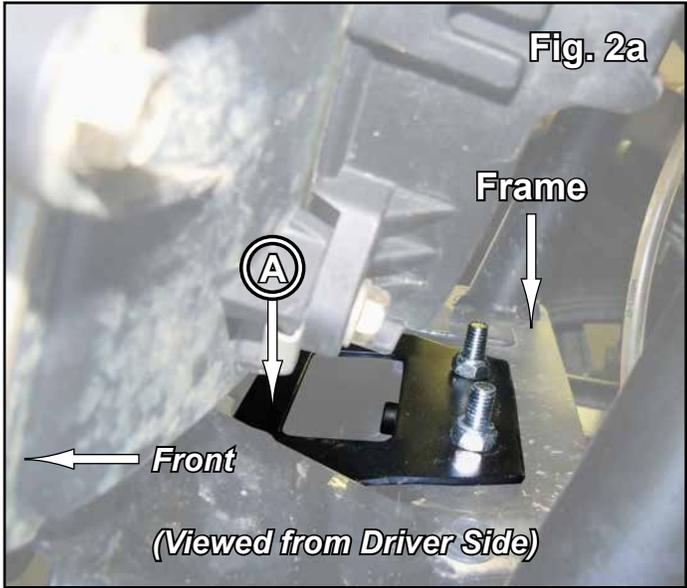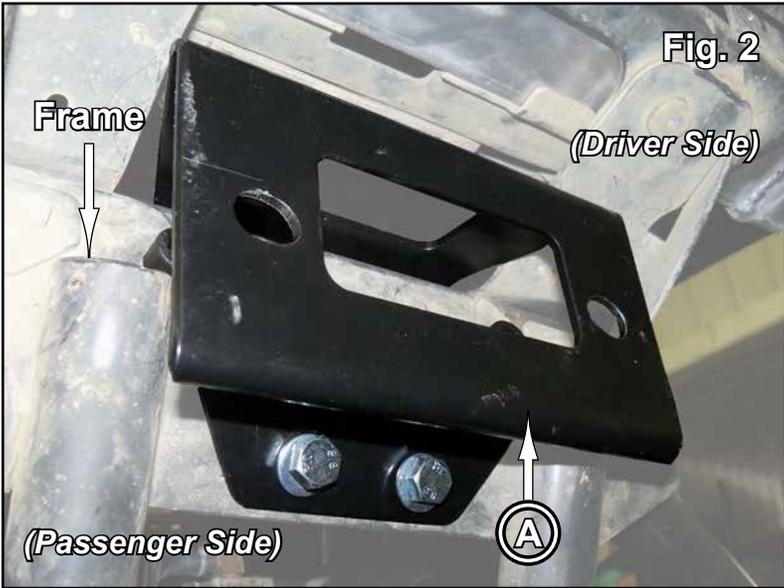

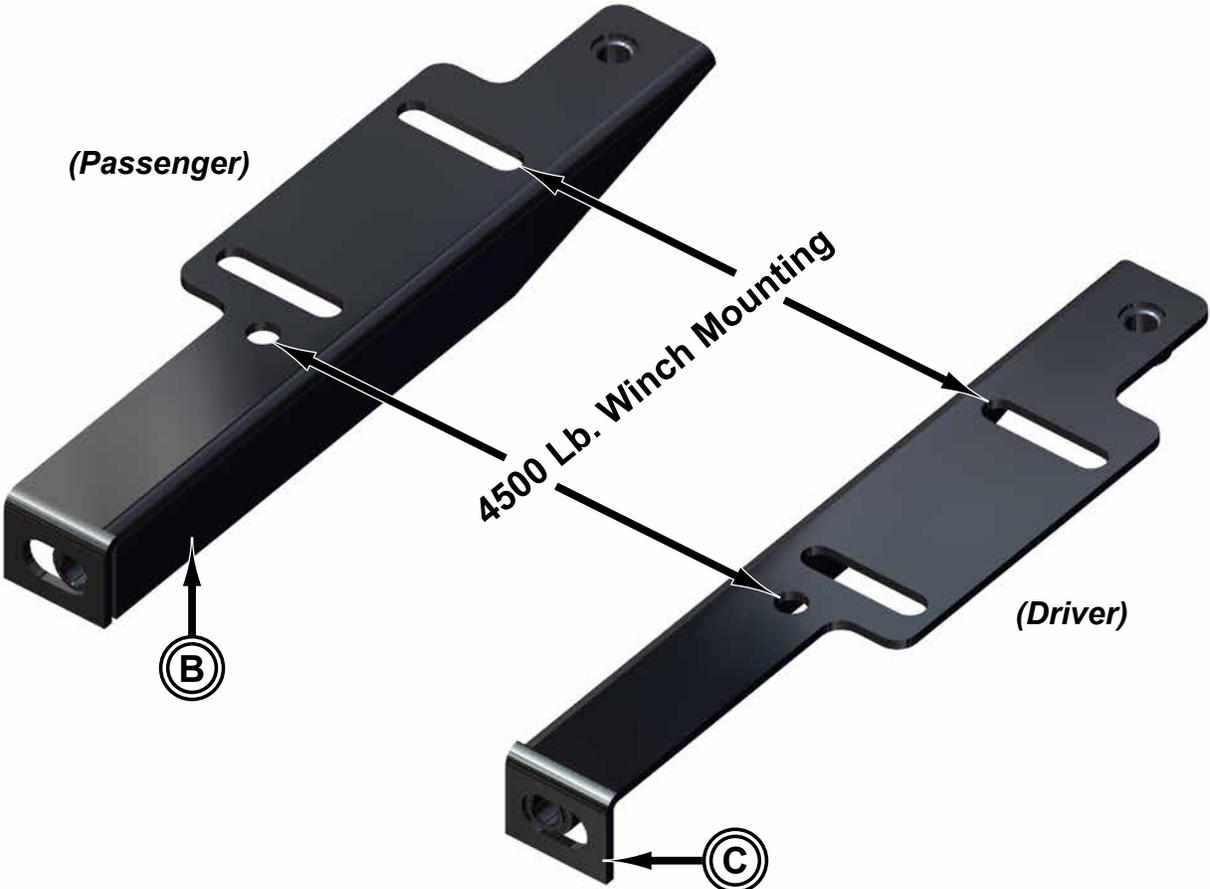

Winch Mounting Locations

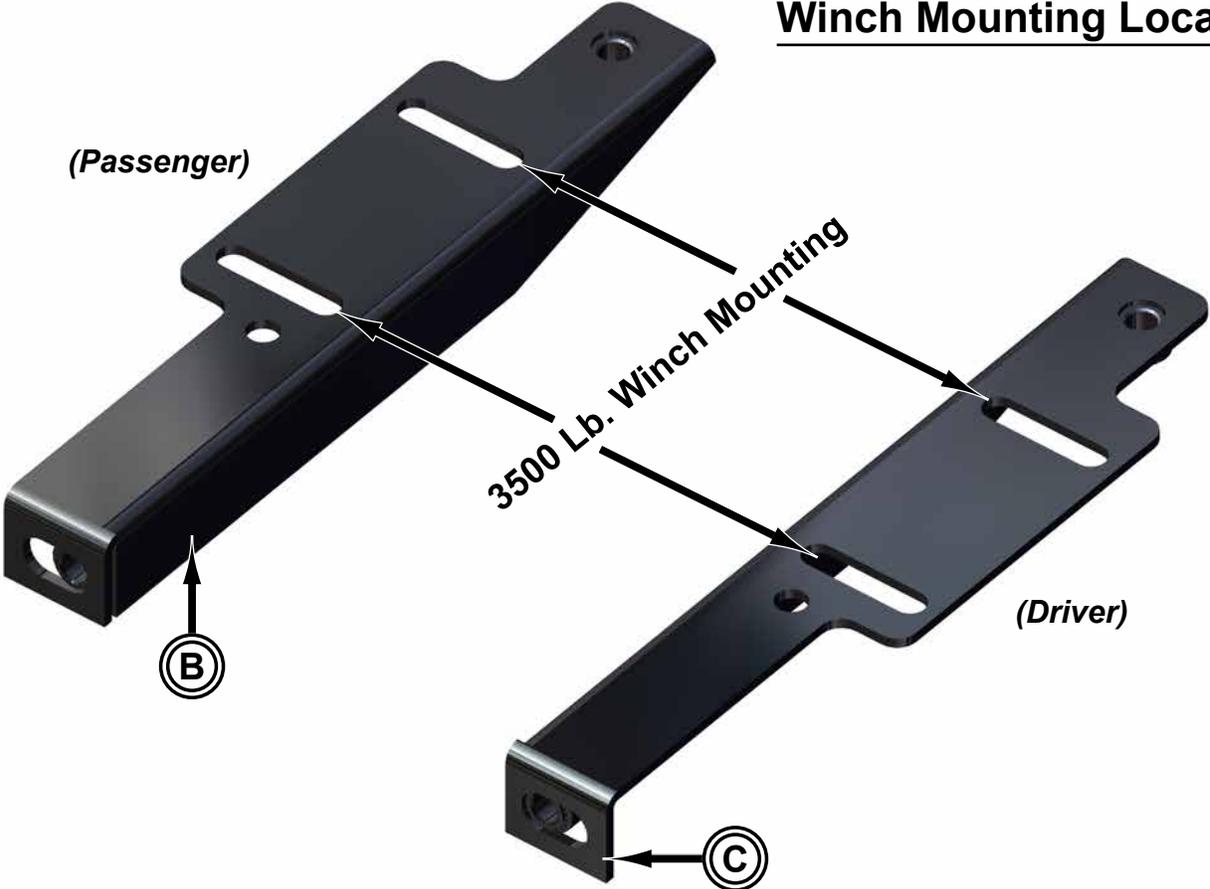

Notes:



Minor interference, between Winch and Radiator Hose, may occur in some installations. Use Flex Loom or applicable material to prevent.

